

Enclosures **New Sentry Series**

PVC Enclosure 4 x 4 x 2 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog
Number**

J442PVC

UPC



785928500107

DESCRIPTION

4H x 4W x 2D Inches New Sentry Series PVC Enclosures are corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdown lift-off cover and 4 captive brass cover screws.

APPLICATION

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

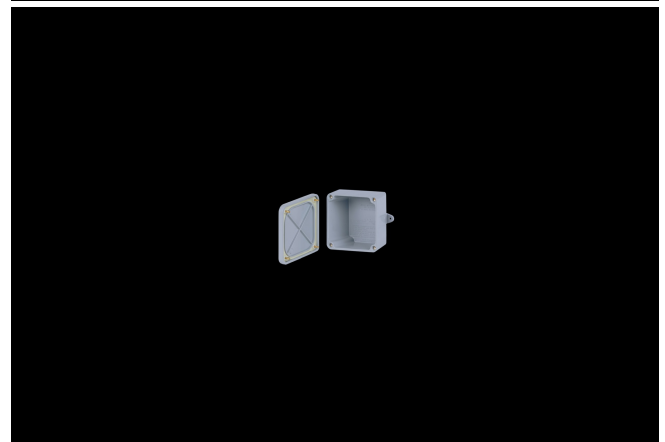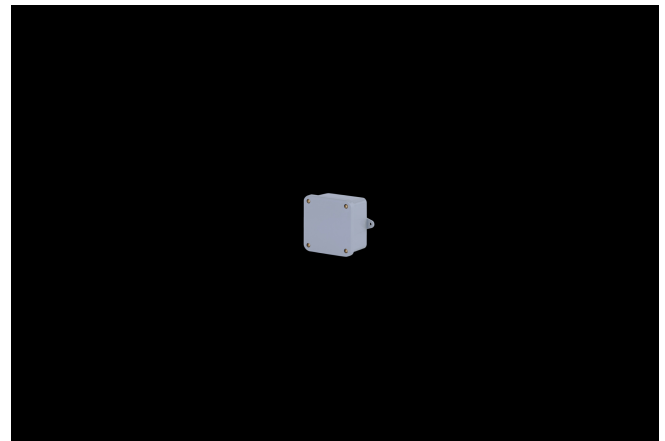

FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket
- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

General Information

| | |
|--------------------------------|---------------|
| Color | Gray |
| Cover Type | Opaque |
| Mounting Type | Wall Mount |
| Material | PVC |
| Back Panel Screw Size | |
| Cover Screw Size | #8-32 |
| Cover Screw Recommended Torque | 16-20 in-lbs |
| Cover Screw Material | Brass |
| Mounting Foot Screw Size | 10-16 Hi-Lo |
| Installation Mounting Torque | 30 in-lbs Max |
| Metal Inserts | Brass |
| Gasket Material | PVC Seamless |
| Country of Origin | USA |

DIMENSIONS

| | |
|-------------------|-------|
| Height (in) | 4.0 |
| Width (in) | 4.0 |
| Depth (in) | 2.4 |
| Height (mm) | 102.4 |
| Width (mm) | 102.4 |
| Depth (mm) | 61.5 |
| Usable Depth (in) | 2.0 |
| Usable Depth (mm) | 51.0 |

STANDARDS

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960
UL508A

CSA Std. C22.2 File 207025

Type 1; 2; 3; 4; 4X; 12; 13

Temperature Range °F -4°F to +140°F

Temperature Range °C -20°C to +60°C

Flammability Rating UL94-V0

Outdoor Exposure UL746c (f1) Rated