

Enclosures **Starke Series**

## Polycarbonate Enclosure Small 10 x 6 x 4 Inches Starke Series with Opaque Lift Off Cover



**Catalog Number**

ST251690W

**UPC**

785928571916


### DESCRIPTION

10H x 6W x 4D Inches Starke Series Small Polycarbonate Enclosure with Opaque (ST) Screw Cover (4 Cover Screws, Lift-off Configuration) features flush sides making it ideal for OEM designed product. Raised bosses accommodate back panel mounting and are used for remote sensor mounting and small electronic controls in any environment.

### APPLICATION

- Small; simple design ideal for OEMs in the electronics market; circuit boards and wiring applications
- Used for remote sensor mounting and small electronic controls in any environment
- Used indoors or outdoors
- Used in highly corrosive areas

### FEATURES

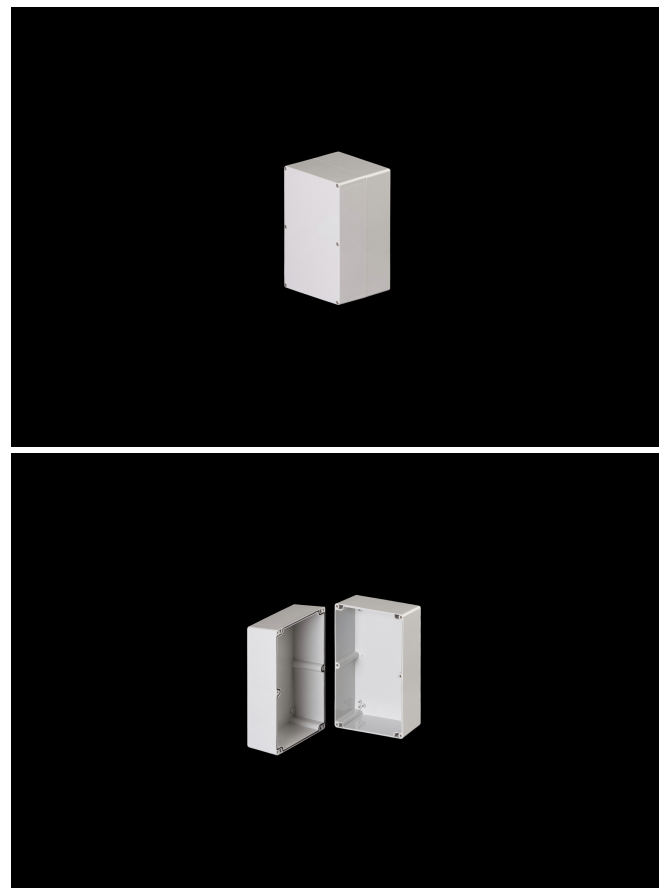

- Opaque Cover
- Multiple depths available in most sizes
- Resistant to harsh environments
- Flush sides for that perfect fit
- Multiple molded in bosses for a variety of mounting solutions
- Back Panels Available for all sizes

## General Information

---

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	Polycarbonate
Back Panel Screw Size	Plastite 48 #8
Back Panel Recommended Torque	12-16 in-lbs
Back Panel Screw Material	304 SS
Cover Screw Material	304 SS
Installation Mounting Torque	25-30 in-lbs Max
Metal Inserts	Brass
Gasket Material	Poured In Place (PIP) Polyurethane Seamless
Country of Origin	Germany

## DIMENSIONS

---

Height (in)	10.0
Width (in)	6.0
Depth (in)	4.0
Height (mm)	254.0
Width (mm)	152.4
Depth (mm)	101.6
Usable Depth (in)	3.1
Usable Depth (mm)	79.0

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; cULus Listed File  
UL508A #E64358

CSA Std. C22.2 cULus Listed File  
#E64358

Type 1; 3R; 4; 4X; 12

IEC 60529; UL Listed IP66  
#E362920

Temperature Range °F -40°F to +212°F

Temperature Range °C -40°C to +100°C

Flammability Rating UL94-V2

Outdoor Exposure UL746c (f1) Rated

CE Certified