

Accessories **Replacement Cover**

Polycarbonate Clear Replacement Cover for Diamond Shield 12 x 10 Inches



**Catalog
Number**

DSCC1210CVR

UPC

785928911767

DESCRIPTION


12H x 10W Inches Diamond Series Polycarbonate Clear Cover Only. Includes gasketed cover only. No hardware included.

APPLICATION

- Suited for high-end and harsh industrial applications
- Used indoors or outdoors
- Innovative internal panel management capabilities
- Used in highly corrosive areas
- Panel mounting in the cover for use as an Operator Interface Enclosures in industrial equipment control stations

FEATURES

- Clear polycarbonate replacement cover for Diamond Shield Series
- Maximum visibility to raised panels and control boxes
- High temperature; flame retardant; non corrosive; environmental designs

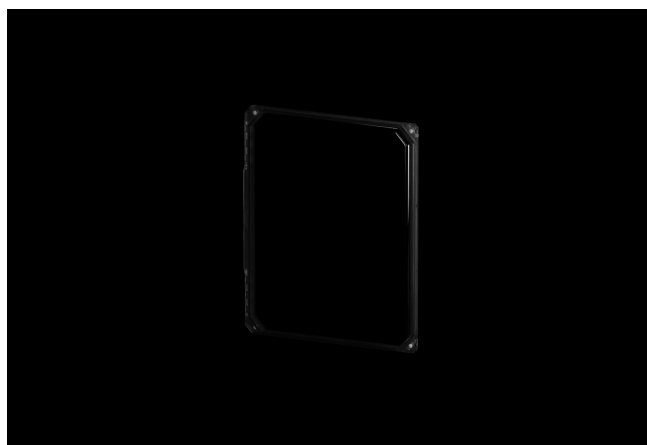

- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact
- Solid construction in a lightweight design
- UV resistant

General Information

| | |
|--------------------------------|--|
| Color | Clear |
| Cover Type | Clear |
| Material | Polycarbonate |
| Cover Screw Size | #10-32 x 1-1/4 |
| Cover Screw Recommended Torque | 20-24 in-lbs |
| Cover Screw Material | 304 SS |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | USA |

DIMENSIONS

| | |
|-------------|-------|
| Height (in) | 13.5 |
| Width (in) | 11.8 |
| Height (mm) | 341.9 |
| Width (mm) | 300.5 |

STANDARDS

NEMA 10250; UL 50; UL 50e; cULus Listed File
UL508A #E64358

CSA Std. C22.2 cULus Listed File
#E64358

Type 1; 3; 3S; 4; 4X; 12; 13

IEC 60529; UL Listed IP66
#E362920

UL1741 UL Listed File #E333478

Temperature Range °F -76°F to +274°F

Temperature Range °C -60°C to +134°C

Window Temperature Range -40°F to +248°F
°F

Window Temperature Range -40°C to +120°C
°C

Flammability Rating UL94-5VA

NFPA No. 101 Flame Spread Class A(1)

Outdoor Exposure UL746c (f1) Rated

CE Certified