

Accessories **Environmental Management**

Hole Plug for 1 Inch and 1-1/4 Inch Conduit



**Catalog
Number**

REHPSERIES3

UPC

785928911941

DESCRIPTION


PluggIt! Hole Plugs Seals Cutouts for 1 Inch and 1-1/4 Inch conduit diameters. PluggIt! hole plugs are submersion and hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

APPLICATION

- Hole Plug used with enclosures which house electrical and electronic controls; instruments; and components
- Used with enclosures indoors or outdoors
- Suited for harsh industrial or commercial applications

FEATURES

- PluggIt! Superior corrosion resistance compared to rust-prone carbon steel and other metallic alternatives helps ensure increased enclosure life expectancy.
- Considerably better long-term resistance to UV degradation versus UV-susceptible soft rubber plugs that turn brittle from extreme temperature variations and repeated UV exposure.

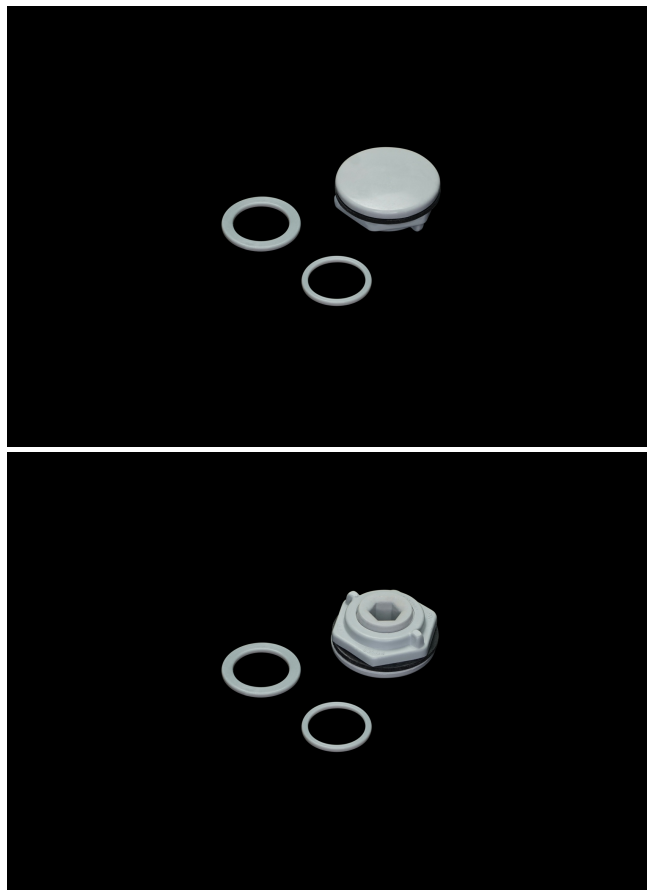

- Will not create galvanic corrosion associated with dissimilar metals sometimes used in electrical enclosures.
- Maintains all chemical resistance features of current Robroy Enclosures products.
- A submersion/hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

General Information

| | |
|-------------------|-------------|
| Color | Gray |
| Material | Fiberglass |
| Gasket Material | EPDM Rubber |
| Country of Origin | India |

DIMENSIONS

| | |
|-----------------------------|-----|
| Common Industry application | 1.0 |
|-----------------------------|-----|

STANDARDS

| | |
|-----------------------------------|----------------------------|
| NEMA 10250; UL 50; UL 50e; UL508A | UL Recognized File #E64358 |
| CSA Std. C22.2 | File LR069014 |
| Type | 1; 3R; 4; 4X; 6; 6P; 12 |
| IEC 60529; UL Listed #E362920 | IP66; IP68 |
| Temperature Range °F | -26°F to +257°F |
| Temperature Range °C | -32°C to +125°C |
| Flammability Rating | UL94-V0 |
| Outdoor Exposure UL746c | (f1) Rated |