

Accessories Replacement Cover

Fiberglass Opaque Replacement Cover with Viewing Window for Diamond Shield 14 x 12 Inches

Catalog Number DSW1412CVR
UPC 785928911521

DESCRIPTION


14H x 12W Inches Diamond Shield Series Fiberglass Enclosure Cover Only with Viewing Window. To be used as a replacement cover

APPLICATION

- Suited for high-end and harsh industrial applications
- Used indoors or outdoors
- Innovative internal panel management capabilities
- Used in highly corrosive areas
- Panel mounting in the cover for use as an Operator Interface Enclosures in industrial equipment control stations

FEATURES

- Flush bonded window replacement cover for Diamond Shield Series
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact
- Solid construction in a lightweight design

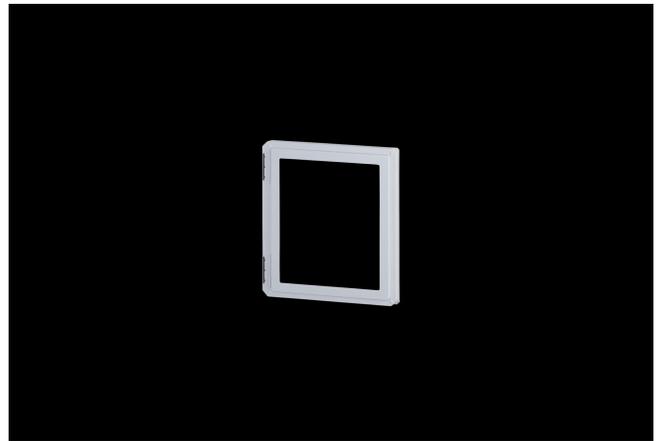

- UV resistant

General Information

| | |
|--------------------------------|--|
| Color | Gray |
| Cover Type | Window |
| Material | Fiberglass |
| Cover Screw Size | #10-32 x 1-1/4 |
| Cover Screw Recommended Torque | 20-24 in-lbs |
| Cover Screw Material | 304 SS |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | USA |

DIMENSIONS

| | |
|-------------|---------|
| Height (in) | 15.49 |
| Width (in) | 13.86 |
| Height (mm) | 393.446 |
| Width (mm) | 352.044 |

STANDARDS

| | |
|-----------------------------|-----------------|
| Temperature Range °F | -76°F to +274°F |
| Temperature Range °C | -60°C to +134°C |
| Window Temperature Range °F | -26°F to +170°F |
| Window Temperature Range °C | -32°C to +76°C |
| Flammability Rating | UL94-5VA |
| Outdoor Exposure UL746c | (f1) Rated |