

Accessories **Replacement Cover**

## Fiberglass Opaque Replacement Cover with Viewing Window for Diamond Shield 20 x 16 Inches

**Catalog  
Number**

DSW2016CVR

**UPC**

785928911613

### DESCRIPTION


20H x 16W Inches Diamond Shield Series  
Fiberglass Enclosure Cover Only with Viewing  
Window. To be used as a replacement cover

### APPLICATION

- Suited for high-end and harsh industrial applications
- Used indoors or outdoors
- Innovative internal panel management capabilities
- Used in highly corrosive areas
- Panel mounting in the cover for use as an Operator Interface Enclosures in industrial equipment control stations

### FEATURES

- Flush bonded window replacement cover for Diamond Shield Series
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact
- Solid construction in a lightweight design

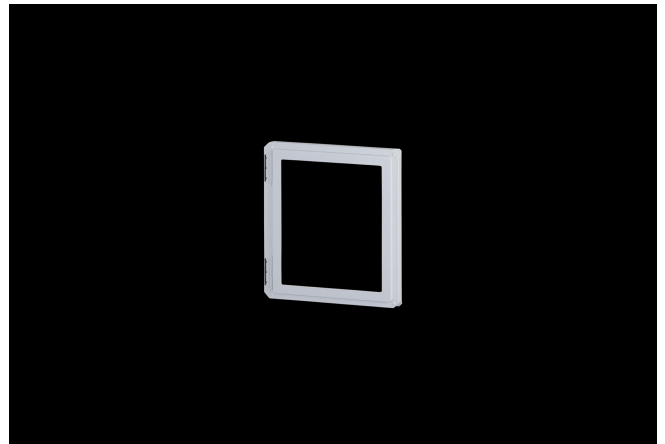

- UV resistant

## General Information

|                                |                                                |
|--------------------------------|------------------------------------------------|
| Color                          | Gray                                           |
| Cover Type                     | Window                                         |
| Material                       | Fiberglass                                     |
| Cover Screw Size               | #10-32 x 1-1/4                                 |
| Cover Screw Recommended Torque | 20-24 in-lbs                                   |
| Cover Screw Material           | 304 SS                                         |
| Gasket Material                | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin              | USA                                            |

## DIMENSIONS

|             |       |
|-------------|-------|
| Height (in) | 21.8  |
| Width (in)  | 18.2  |
| Height (mm) | 553.5 |
| Width (mm)  | 461.5 |

## STANDARDS

|                             |                 |
|-----------------------------|-----------------|
| Temperature Range °F        | -76°F to +274°F |
| Temperature Range °C        | -60°C to +134°C |
| Window Temperature Range °F | -26°F to +170°F |
| Window Temperature Range °C | -32°C to +76°C  |
| Flammability Rating         | UL94-5VA        |
| Outdoor Exposure UL746c     | (f1) Rated      |