



**Accessories Replacement Cover** 

# Polycarbonate Clear Replacement Cover for Diamond Shield 10 $\times$ 8 Inches





Catalog Number DSCC1008CVR

**UPC** 

785928911736

#### **DESCRIPTION**


10H x 8W Inches Diamond Series Polycarbonate Clear Cover Only. No Hardware Included.

### **APPLICATION**

- Suited for high-end and harsh industrial applications
- •Used indoors or outdoors
- •Innovative internal panel management capabilities
- Used in highly corrosive areas
- Panel mounting in the cover for use as an Operator Interface Enclosures in industrial equipment control stations

#### **FEATURES**

- •Clear polycarbonate replacement cover for Diamond Shield Series
- Maximum visibility to raised panels and control boxes
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally

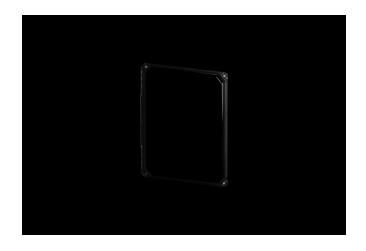



## **Accessories**

sound space

- High impact resistance
- Double insulated material no incidental electrical contact
- •Solid construction in a lightweight design
- •UV resistant

### **General Information**

Color	Clear
Cover Type	Clear
Material	Polycarbonate
Cover Screw Size	#10-32 x 1-1/4
Cover Screw Recommended Torque	20-24 in-lbs
Cover Screw Material	304 SS
Gasket Material	Poured In Place (PIP) Polyurethane Seamless
Country of Origin	USA

### **DIMENSIONS**

Height (in)	11.4
Width (in)	9.8
Height (mm)	290.1
Width (mm)	248.9



# **Accessories**

### **STANDARDS**

NEMA 10250; UL 50; UL 50e; UL508A	cULus Listed File #E64358
CSA Std. C22.2	cULus Listed File #E64358
Туре	1; 3; 3S; 4; 4X; 12; 13
IEC 60529; UL Listed #E362920	IP66
UL1741	UL Listed File #E333478
Temperature Range °F	-76°F to +274°F
Temperature Range °C	-60°C to +134°C
Window Temperature Range °F	-40°F to +248°F
Window Temperature Range °C	-40°C to +120°C
Flammability Rating	UL94-5VA
NFPA No. 101 Flame Spread	Class A(1)
Outdoor Exposure UL746c	(f1) Rated
CE	Certified