



Accessories Environmental Management

Hole Plug for 2-1/2 Inch Conduit





Catalog Number REHPSERIES5

UPC

785928912009

DESCRIPTION


PluggIt! Hole Plugs Seals Cutouts for 2-1/2 Inch conduit diameters. PluggIt! hole plugs are submersion and hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

APPLICATION

- Hole Plug used with enclosures which house electrical and electronic controls; instruments; and components
- •Used with enclosures indoors or outdoors
- Suited for harsh industrial or commercial applications

FEATURES

- Plugglt! Superior corrosion resistance compared to rustprone carbon steel and other metallic alternatives helps ensure increased enclosure life expectancy.
- Considerably better long-term resistance to UV degradation versus UV-susceptible soft rubber plugs that turn brittle from extreme temperature variations and repeated UV exposure.

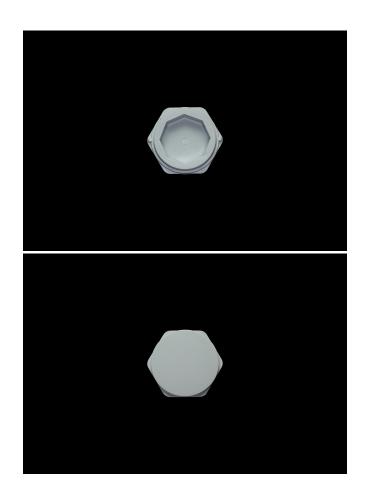



Accessories

- Will not create galvanic corrosion associated with dissimilar metals sometimes used in electrical enclosures.
- Maintains all chemical resistance features of current Robroy Enclosures products.
- •A submersion/hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

General Information

| Color | Gray |
|-------------------|-------------|
| Material | Fiberglass |
| Gasket Material | EPDM Rubber |
| Country of Origin | India |

DIMENSIONS

| Common | Industry |
|-------------|----------|
| application | |

2.0

STANDARDS

| NEMA 10250; UL 50; UL 50e; UL508A | UL Recognized File #E64358 |
|--------------------------------------|-------------------------------|
| CSA Std. C22.2 | File LR069014 |
| Туре | 1; 3R; 4; 4X; 6; 6P; 12 |
| IEC 60529; UL Listed #E362920 | IP66; IP68 |
| Temperature Range °F | -26°F to +257°F |
| Temperature Range °C | -32°C to +125°C |
| Flammability Rating | UL94-V0 |
| Outdoor Exposure UL746c | (f1) Rated |