

Enclosures **Diamond Shield Series**

## Fiberglass Enclosure 8 x 6 x 4 Inches Diamond Shield Series with Opaque Lift Off Cover



**Catalog  
Number**

**DS80604W**

**UPC**

**785928906510**


### DESCRIPTION

8H x 6W x 4D Inches Diamond Shield Series Fiberglass Enclosure with a "W" Opaque Cover (Lift-Off, 4 Cover Screws) is designed for high-end electronics, harsh corrosive environments and industrial applications both indoors and outdoors. The series offers an additional feature of panel mounting in the cover for use as an operator interface in industrial equipment control stations where required.

### APPLICATION

- Suited for high-end and harsh industrial applications
- Used indoors or outdoors
- Innovative internal panel management capabilities
- Used in highly corrosive areas
- Panel mounting in the cover for use as an Operator Interface Enclosures in industrial equipment control stations

### FEATURES

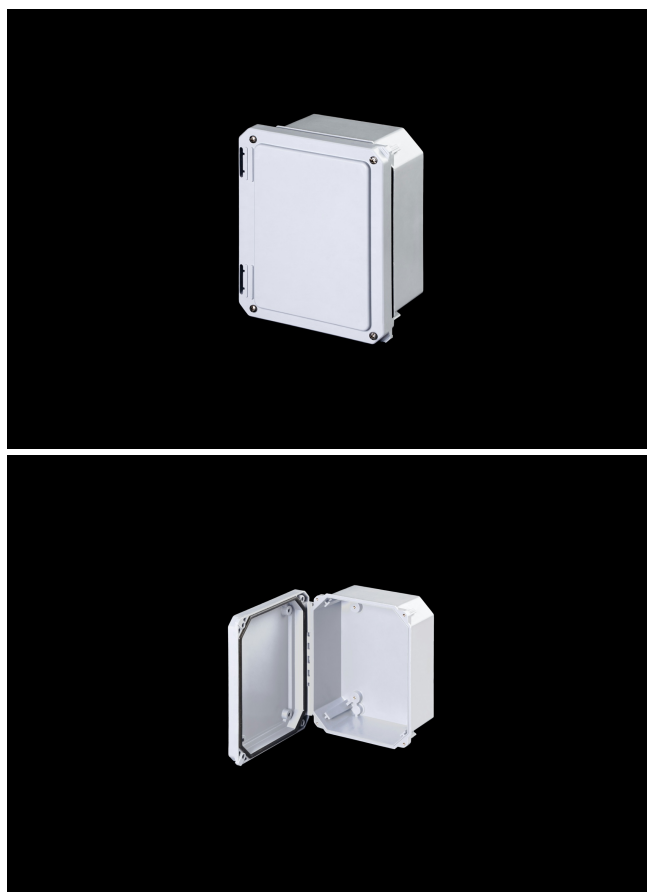

- Opaque Cover
- Maximum visibility to raised panels and control boxes
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact
- Solid construction in a lightweight design
- UV resistant
- Manufactured with SolarGuard®, Stahlin's proprietary formulation of non-halogenated fiberglass, offering superior resistance to outdoor exposure, chemicals and flames.
- Back Panels Available for all sizes

## General Information

|                                        |                                                |
|----------------------------------------|------------------------------------------------|
| Color                                  | Gray                                           |
| Cover Type                             | Opaque                                         |
| Mounting Type                          | Wall Mount                                     |
| Material                               | Fiberglass                                     |
| Back Panel Screw Size                  | #10-32 x 3/8                                   |
| Back Panel Recommended Torque          | 16-20 in-lbs                                   |
| Back Panel Screw Material              | 304 SS                                         |
| Cover Screw Size                       | #10-32 x 1-1/4                                 |
| Cover Screw Recommended Torque         | 20-24 in-lbs                                   |
| Cover Screw Material                   | 304 SS                                         |
| Mounting Foot Screw Size               | #10-32 x 7/16                                  |
| Mounting Foot Screw Recommended Torque | 22-25 in-lbs                                   |
| Installation Mounting Torque           | 45 in-lbs Max                                  |
| Metal Inserts                          | Brass                                          |
| Gasket Material                        | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin                      | USA                                            |

## DIMENSIONS

|                   |         |
|-------------------|---------|
| Height (in)       | 9.42    |
| Width (in)        | 7.79    |
| Depth (in)        | 4.31    |
| Height (mm)       | 239.268 |
| Width (mm)        | 197.866 |
| Depth (mm)        | 109.474 |
| Usable Depth (in) | 3.6     |
| Usable Depth (mm) | 92      |
| Weight (lbs)      | 4.1     |

## STANDARDS

|                                   |                           |
|-----------------------------------|---------------------------|
| NEMA 10250; UL 50; UL 50e; UL508A | cULus Listed File #E64358 |
| CSA Std. C22.2                    | cULus Listed File #E64358 |
| Type                              | 1; 3; 3S; 4; 4X; 12; 13   |
| IEC 60529; UL Listed #E362920     | IP66                      |
| UL1741                            | UL Listed File #E333478   |
| Temperature Range °F              | -76°F to +274°F           |
| Temperature Range °C              | -60°C to +134°C           |
| IEC 62262 Impact Rating Listed    | IK10 per File #E362920    |
| Flammability Rating               | UL94-5VA                  |
| NFPA No. 101 Flame Spread         | Class A(1)                |
| Outdoor Exposure UL746c           | (f1) Rated                |
| CE                                | Certified                 |