

Enclosures **New Sentry Series**

## **PVC Enclosure 12 x 12 x 4 Inches New Sentry Series with Opaque Lift Off Cover**



**Catalog  
Number**

J12124PVC

**UPC**


785928500909

### **DESCRIPTION**

12H x 12W x 4D Inches New Sentry Series PVC Enclosures corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdow lift-off cover and 4 captive brass cover screws.

### **APPLICATION**

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

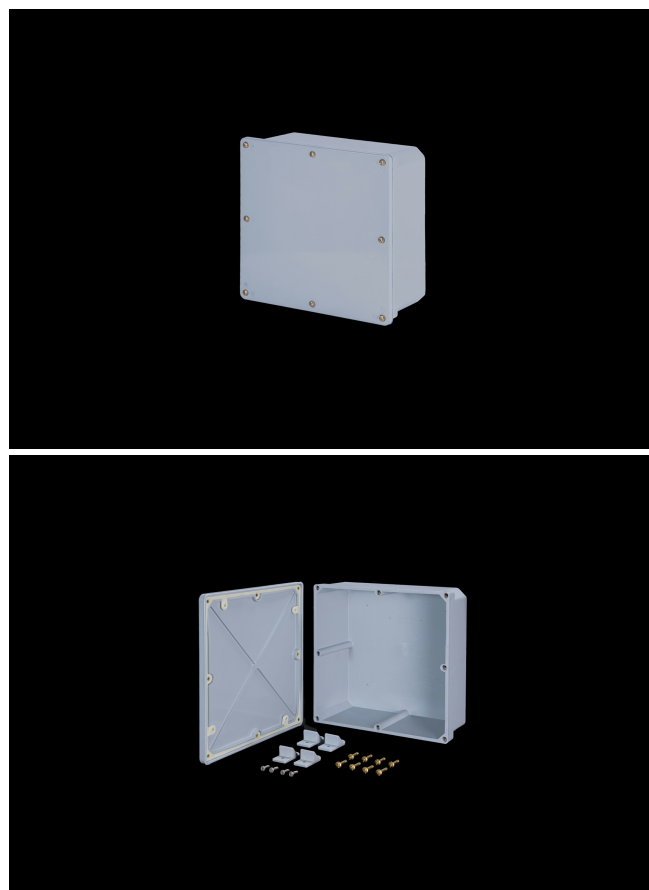

## FEATURES

---

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket
- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

## General Information

---

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	PVC
Back Panel Screw Size	
Cover Screw Size	#8-32
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Brass
Mounting Foot Screw Size	1/4-15 Hi-Lo
Installation Mounting Torque	40 in-lbs Max
Metal Inserts	Brass
Gasket Material	PVC Seamless
Country of Origin	USA

## DIMENSIONS

---

Height (in)	12.9
Width (in)	12.9
Depth (in)	4.7
Height (mm)	328.7
Width (mm)	328.7
Depth (mm)	119.4
Usable Depth (in)	4.0
Usable Depth (mm)	102.0

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960  
UL508A

CSA Std. C22.2	File 207025
----------------	-------------

Type	1; 2; 3; 4; 4X; 12; 13
------	------------------------

Temperature Range °F	-4°F to +140°F
----------------------	----------------

Temperature Range °C	-20°C to +60°C
----------------------	----------------

Flammability Rating	UL94-V0
---------------------	---------

Outdoor Exposure UL746c	(f1) Rated
-------------------------	------------