

Enclosures **CF Series**

Polycarbonate Enclosure 5 x 3 x 3 Inches CF Series Slim with Opaque Lift Off Cover



**Catalog
Number**

CFPC533

UPC

785928564642


DESCRIPTION

5H x 3W x 3D Inches Polycarbonate CF Series Slim Enclosure with Opaque Lift Off Cover is ideal for compact or portable control or simply as a small junction box. This stream lines series features unobstructed sidewalls, captive cover screws and a full range of sizes.

APPLICATION

- For use in many MRO and OEM applications
- Slim design allows easy installation of pushbuttons and switches in machine control applications with tight or dense space requirements
- Used in compact or portable control systems or for use as an Operator Interface Enclosure in both indoor and outdoor environments
- Used as general Junction Enclosures or termination point enclosures in an electrical system
- Used indoors or outdoors

FEATURES

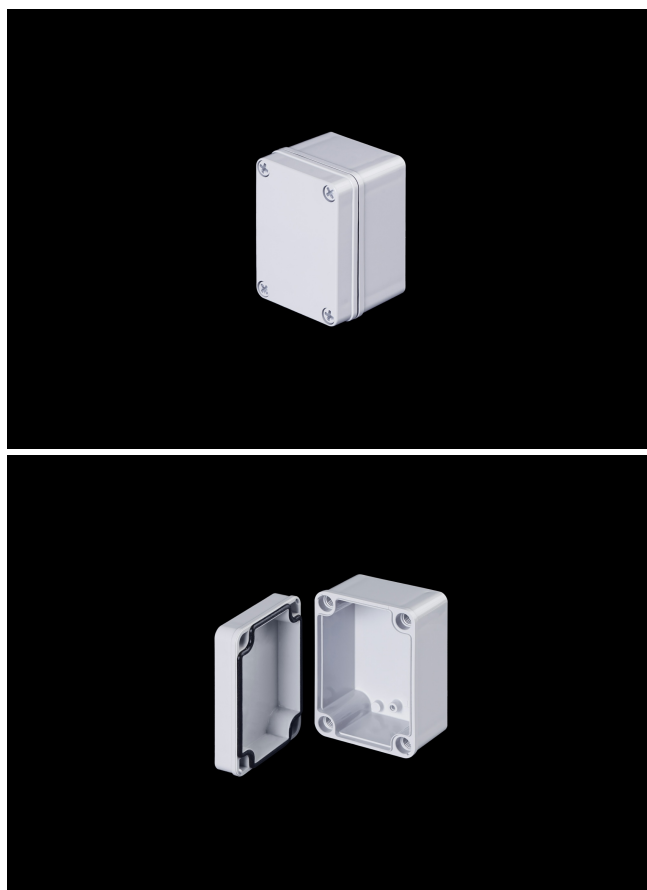

- Memory retaining continuous polyurethane gasket
- Corrosion resistant polycarbonate
- Submersible; non corrosive; environmental design
- High Impact Resistance

General Information

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	Polycarbonate
Cover Screw Size	Custom
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Polycarbonate
Installation Mounting Torque	25-30 in-lbs Max
Metal Inserts	
Gasket Material	Poured In Place (PIP) Polyurethane Seamless
Country of Origin	USA

DIMENSIONS

Height (in)	5.0
Width (in)	3.0
Depth (in)	3.0
Height (mm)	127.0
Width (mm)	76.2
Depth (mm)	76.2
Usable Depth (in)	3.3
Usable Depth (mm)	82.8

STANDARDS

NEMA 10250; UL 50; UL 50e; cULus Listed File
UL508A #E64358

CSA Std. C22.2 cULus Listed File
#E64358

Type 1; 3R; 4; 4X; 6P; 12

IEC 60529; UL Listed IP66; IP68
#E362920

Temperature Range °F -40°F to +248°F

Temperature Range °C -40°C to +120°C

Flammability Rating UL94-5VA

Outdoor Exposure UL746c (f1) Rated

CE Certified