

The Largest J Series Yet!!

Now available from Stahlin Non-Metallic Enclosures:

- J Series 30x24 with hinged lockable pull latch (HPL)
- J Series 24x30 with hinged lockable pull latch (HPL)

Expanded J HPL

The Stahlin J Series product line was designed as an industrial enclosure for harsh, aggressive environments.

Originally developed as an electrical junction box for the oil refining and petrochem industries, the J series has evolved into a versatile industrial enclosure line. It's now available in 18 sizes with varied applications for use from high-end electronics to extreme corrosive applications both indoors and out; currently servicing all industrial applications.

With over six decades of proven performance the rugged design combined with tough, durable materials, for extreme reliability in tough environments are key attributes of this series.

Now, with two new sizes in our most popular configuration – hinged lockable pull latch (HPL) – the Stahlin J Series is bigger, better, and offers you more space for maximum protection at a competitive price and available when you need it!

Expanded "J" Series HPL Featured Benefits



- Overhang cover on smooth sided base
- Full 180°+ door opening
- Mounting foot gussets for structural integrity and robustness
- Slotted mounting hole ensures flexibility in mounting and easy changeability with other commercial options
- Off the shelf hardware for convenience in installation
- Field replaceable stainless steel latches
- · Full length stainless steel piano hinge
- · Rugged design provides industry leading weight loads

- More available space for reliable enclosure protection
- UL Listed 4X and IP66
- Chemically resistant fiberglass reinforced composite formulation for long product life cycle
- Non-corrosive
- UV resistance featuring patented SolarGuard®, the best available protection against UV degradation
- Resistance to extreme temperatures
- Flame retardant UL94-5V
- Channel captured gasket assures seal integrity
- Light weight for ease of handling and cost reduction
- Industrially tough, but easily modified
- New T-Slot design for easy installation of a swing panel, dead front, or din rail mounting





Stahlin's 30" Expanded J HPL Offerings


Industry Standards


- UL Listed for NEMA 250 and CSA C22.2
- Type 1, 3, 3R, 4, 4X, 12, 13
- IEC60529 IP66
- Temperature Range (-76°F to +274°F) (-60°C to +134°C)
- Flammability Rating UL94-5V
- Self-Extinguishing, Non-Halogenated, Non-Flame Propagating
- NFPA No. 101 Flame Spread Class A (1)





Non-penetrating stainless steel latches

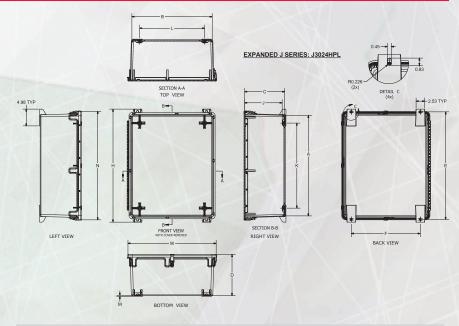

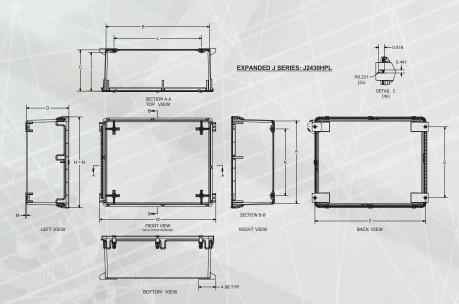

Expanded J Series Enclosures Technical Drawing and Dimensional Information

SIZE ID NUMBER	OVERALL H x W x D	INSIDE A x B x C	MOUNTING E x F	J	K	L	М	N	MOUNTING SLOT SIZE	SHIPPING WEIGHT	PANEL NUMBER
J3024HPL	33.56 x 26.18 x 12.26	29.85 x 23.85 x 11.89	31.93 x 20.49	11.06	25.25	19.25	0.28	32.19	0.83 x 0.45	46 lbs.	BPJ3024**
J2430HPL	26.18 x 33.56 x 12.26	23.85 x 29.85 x 11.89	20.49 x 31.93	11.06	19.25	25.25	0.28	26.18	0.45 x 0.83	46 lbs.	BPJ3024**

** denotes panel material AL = aluminum CS = carbon steel

For more details, contact:

Stahlin Non-Metallic Enclosures 500 Maple Street Belding, MI 48809









Phone: 616-794-0700 Fax: 616-794-3378 CSR@RobroyEnclosures.com **www.stahlin.com**

