



Polycarbonate Enclosures

**The most durable and reliable
polycarbonate enclosures available!**

Dimensional Requirements 6" x 6" to 24" x 24"

Made in the U.S.A., PolyStar® polycarbonate enclosures can withstand rain, sleet, snow, splashing water, hose directed water and submersion --- and provide superior impact and flame protection!


- 13 standard sizes: 6x6, 8x6, 8x8, 10x8x4, 10x8x6, 10x10, 12x10, 14x12, 16x14, 18x16x4, 18x16x10, 20x16, and 24x24
- Polycarbonate latches and hinges do not penetrate enclosure
- Easy to remove lid
- High performance inserts
- Integrated lock hasp
- Flush-fit side mount swing panel and DIN rail system
- Molded in bosses
- Multi-directional mounting feet
- Rated Type 1, 3R, 4, 4X, 6P, 12
- Rated IEC IP66, IP68 File: E362920
- UL/cUL Approved File: E319779



www.stahlin.com


PolyStar® – Side Mount Solutions

- Increases Usable Space
- Provides more Mounting Options
 - DIN rails
 - Side panels
 - Equipment
- Aluminum slot nuts
 - Variable mounting heights
 - #10-32 machine screw



PolyStar® – Panel Systems

- Sub-panel Mounting Solution
 - Revolutionary design
 - Variable height mounting
 - Swings open from any side
 - Panel locks into open position
 - Mounting holes are standard JIC
- 0.08" Aluminum Panels
- Back Panels are standard JIC

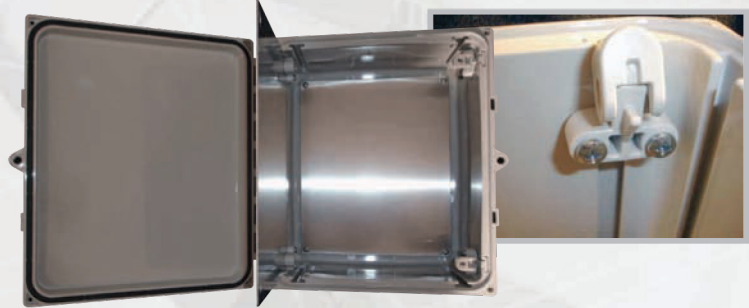

UL 94 - Flame Rating - 5VA

PolyStar® Enclosures provide the highest (most flame retardent) UL 94 rating available.



Outstanding Resistance to Environmental Exposure from -20°F to +240°F

PolyStar® Enclosures are intended to be utilized for outdoor and indoor applications. The polycarbonate contained in the PolyStar® Series as well as the enclosure have passed UL tests for suitability. The polycarbonate resin in the PolyStar® Series received the best rating, an "f1" per UL 746C. This means that the resin has passed tests for UV exposure and water immersion. The PolyStar® Series enclosures are rated 1, 3R, 4, 4X, 6P, 12 per UL 50 and IP66, IP68 per IEC 60529. This means that the enclosure provides protection against ingress (of rain, sleet, snow, splashing water, and hose directed water and submersion), impact, and flame protection. The material rating and the product rating can assure the user that the PolyStar® Series enclosures are suitable for outdoor use and exposure.


Low Temperature Performance

PolyStar® enclosures are manufactured with polycarbonate designed to perform in cold weather applications. In general, the product performance will not be adversely affected until temperatures below -40°F are realized. At temperatures below this level, stress, tension, and pressure could start to impact the enclosure's reliability. This includes the latching, opening and/or incidental impacts. In the absence of these potential threats, the enclosures should remain unaffected by the low temperatures. Upon return of temperatures above -40°F, performance reliability should return to normal.

In the PolyStar® literature, we document a normal operating temperature of -20°F to +240°F (-29°C to +115°C). We do this to provide a safe operating range, as product application and enclosure placement is determined by the end user, not by Stahlin. End-use testing of specific applications and enclosure placements are key to determining the application specific limits.

Part #	Size	Description
OPAQUE COVER ENCLOSURE		
PC606	6 × 6 × 4	PolyStar® Series Enclosure with Opaque Cover
PC806	8 × 6 × 4	PolyStar® Series Enclosure with Opaque Cover
PC808	8 × 8 × 4	PolyStar® Series Enclosure with Opaque Cover NEW!
PC1008	10 × 8 × 4	PolyStar® Series Enclosure with Opaque Cover
PC100806	10 × 8 × 6	PolyStar® Series Enclosure with Opaque Cover NEW!
PC1010	10 × 10 × 6	PolyStar® Series Enclosure with Opaque Cover NEW!
PC1210	12 × 10 × 6	PolyStar® Series Enclosure with Opaque Cover
PC1412	14 × 12 × 6	PolyStar® Series Enclosure with Opaque Cover
PC1614	16 × 14 × 8	PolyStar® Series Enclosure with Opaque Cover
PC181604	18 × 16 × 4	PolyStar® Series Enclosure with Opaque Cover NEW!
PC1816	18 × 16 × 10	PolyStar® Series Enclosure with Opaque Cover
PC2016*	20 × 16 × 8	PolyStar® Series Enclosure with Opaque Cover NEW!
PC2424	24 × 24 × 10	PolyStar® Series Enclosure with Opaque Cover
CLEAR COVER ENCLOSURE		
PC606CC	6 × 6 × 4	PolyStar® Series Enclosure with Clear Cover
PC806CC	8 × 6 × 4	PolyStar® Series Enclosure with Clear Cover
PC808CC	8 × 8 × 4	PolyStar® Series Enclosure with Clear Cover NEW!
PC1008CC	10 × 8 × 4	PolyStar® Series Enclosure with Clear Cover
PC100806CC	10 × 8 × 6	PolyStar® Series Enclosure with Clear Cover NEW!
PC1010CC	10 × 10 × 6	PolyStar® Series Enclosure with Clear Cover NEW!
PC1210CC	12 × 10 × 6	PolyStar® Series Enclosure with Clear Cover
PC1412CC	14 × 12 × 6	PolyStar® Series Enclosure with Clear Cover
PC1614CC	16 × 14 × 8	PolyStar® Series Enclosure with Clear Cover
PC181604CC	18 × 16 × 4	PolyStar® Series Enclosure with Clear Cover NEW!
PC1816CC	18 × 16 × 10	PolyStar® Series Enclosure with Clear Cover
PC2016CC*	20 × 16 × 8	PolyStar® Series Enclosure with Clear Cover NEW!
PC2424CC	24 × 24 × 10	PolyStar® Series Enclosure with Clear Cover
BACK PANELS		
BP66AL	6 × 6	Aluminum Back Panel
BP86AL	8 × 6	Aluminum Back Panel
BP88AL	8 × 8	Aluminum Back Panel NEW!
BP108AL	10 × 8	Aluminum Back Panel
BP1010AL	10 × 10	Aluminum Back Panel NEW!
BP1210AL	12 × 10	Aluminum Back Panel
BP1412AL	14 × 12	Aluminum Back Panel
BP1614AL	16 × 14	Aluminum Back Panel
BP1816AL	18 × 16	Aluminum Back Panel
BPJ2016AL	20 × 16	Aluminum Back Panel NEW!
BP2424PCAL	24 × 24	Aluminum Back Panel
SWING PANEL KITS		
PC606SPK	6 × 6	PolyStar® Series 6×6 Swing Panel Kit (comes with mounts, screws and panel)
PC806SPK	8 × 6	PolyStar® Series 8×6 Swing Panel Kit (comes with mounts, screws and panel)
PC808SPK	8 × 8	PolyStar® Series 8×8 Swing Panel Kit (comes with mounts, screws and panel) NEW!
PC1008SPK	10 × 8	PolyStar® Series 10×8 Swing Panel Kit (comes with mounts, screws and panel)
PC1010SPK	10 × 10	PolyStar® Series 10×10 Swing Panel Kit (comes with mounts, screws and panel) NEW!
PC1210SPK	12 × 10	PolyStar® Series 12×10 Swing Panel Kit (comes with mounts, screws and panel)
PC1412SPK	14 × 12	PolyStar® Series 14×12 Swing Panel Kit (comes with mounts, screws and panel)
PC1614SPK	16 × 14	PolyStar® Series 16×14 Swing Panel Kit (comes with mounts, screws and panel)
PC1816SPK	18 × 16	PolyStar® Series 18×16 Swing Panel Kit (comes with mounts, screws and panel)
PC2016SPK	20 × 16	PolyStar® Series 20×16 Swing Panel Kit (comes with mounts, screws and panel) NEW!
PC2424SPK	24 × 24	PolyStar® Series 24×24 Swing Panel Kit (comes with mounts, screws and panel)
ACCESSORIES		
PCSNK	Slot Nut Kit (includes two nuts & two screws)	
PCSPMK	Swing Panel Mounts (4 per kit)	
PCLATCHKIT	Latch Kit (2 latches per kit) - replacement only	
PCACCESSORYKIT	Accessory Kit (includes all screws, inserts, and mounting feet) - replacement only	
PC__DR	DIN Rail - DIN rail, (2) tribolar self-threading Screws; used for mounting the DIN rail in the base of the enclosure. Sizes: 6", 8", 10", 12", 14", 16", 18", 20", 24" NEW!	
PC__DRK	DIN Rail Kit - Includes DIN rail, two slot nuts, two thread forming screws; Used for mounting DIN rail in the sides of the enclosure. Sizes: 6", 8", 10", 12", 14", 16", 18", 20", 24" NEW!	
PM__	Pole Mount Kit - Includes top and bottom flanges, stainless steel straps, and mounting screws. Sizes: PM6-8, PM10-12, PM14-16, PM18-24 NEW!	

*not available in 6P, or IP68

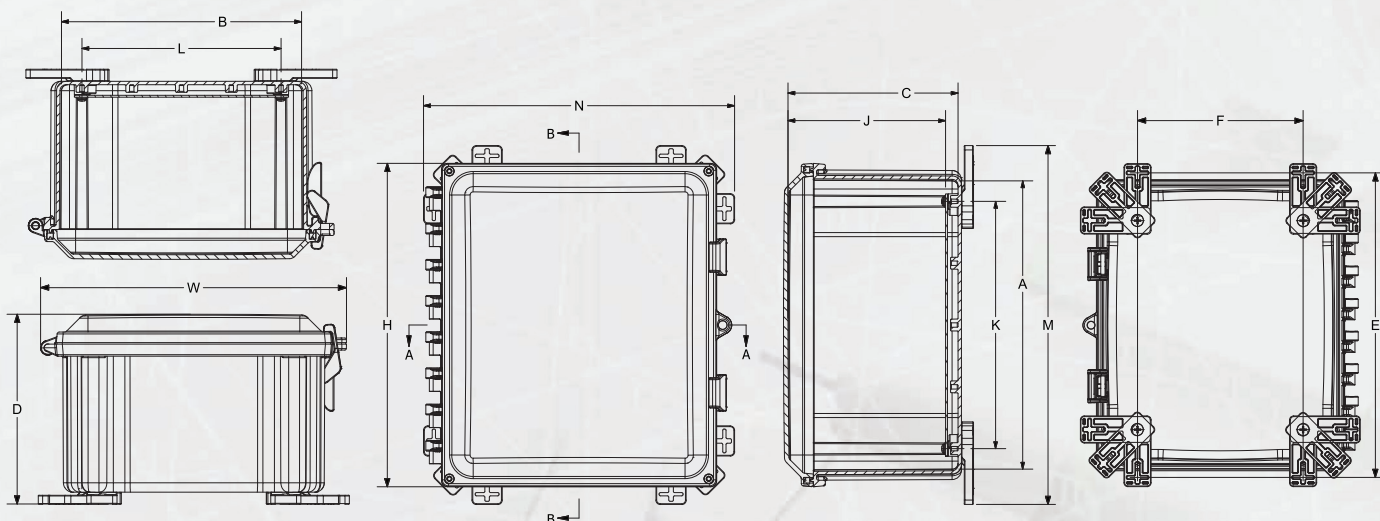

Dimensions (inches)

ENCLOSURE	OVERALL H x W x D	INSIDE A x B x C	MOUNTING HOR. E x F	MOUNTING VER. E x F	MOUNTING 45 E x F	J	K	L	M	N
6 x 6 x 4	7.41 x 8.68 x 5.84	5.94 x 5.94 x 5.02	3.64 x 8.40	8.04 x 3.64	6.75 x 6.74	4.50	4.25	4.25	8.89	8.89
8 x 6 x 4	9.41 x 8.68 x 5.86	7.97 x 5.97 x 5.07	5.64 x 8.04	10.04 x 3.64	8.76 x 6.75	4.56	6.25	4.25	10.89	8.89
8 x 8 x 4	9.41 x 10.68 x 5.86	7.97 x 7.97 x 5.03	5.63 x 10.03	10.04 x 5.63	8.74 x 8.78	4.53	6.25	6.25	10.88	10.88
10 x 8 x 4	11.41 x 10.68 x 6.36	9.96 x 7.96 x 5.57	7.64 x 10.04	12.04 x 5.64	10.76 x 8.75	5.05	8.25	6.25	12.89	10.89
10 x 8 x 6	11.41 x 10.68 x 7.89	9.95 x 7.95 x 7.06	7.63 x 10.03	12.03 x 5.63	10.76 x 8.75	6.54	8.25	6.25	12.88	10.88
10 x 10 x 6	11.41 x 12.68 x 6.97	9.95 x 9.95 x 6.15	7.63 x 12.03	12.03 x 7.63	10.76 x 10.75	5.65	8.25	8.25	12.88	12.88
12 x 10 x 6	13.40 x 12.68 x 7.86	11.95 x 9.95 x 7.07	9.64 x 12.04	14.04 x 7.64	12.76 x 10.75	6.56	10.25	8.25	14.89	12.89
14 x 12 x 6	15.40 x 14.68 x 7.86	13.95 x 11.95 x 7.07	11.64 x 14.04	16.04 x 9.64	14.76 x 12.75	6.56	12.25	10.25	16.89	14.89
16 x 14 x 8	17.65 x 16.68 x 9.98	15.93 x 13.93 x 9.20	13.64 x 16.04	18.04 x 11.64	16.76 x 14.75	8.68	14.25	12.25	18.89	16.89
18 x 16 x 4	19.41 x 18.68 x 5.41	18.16 x 16.16 x 5.08	N/A	20.50 x 13.50	N/A	4.56	16.25	14.25	21.75	N/A
18 x 16 x 10	19.41 x 18.68 x 11.90	17.83 x 15.83 x 11.08	15.64 x 18.04	20.04 x 13.64	18.75 x 16.74	10.56	16.25	14.25	20.89	18.89
20 x 16 x 8	21.41 x 18.68 x 9.97	19.86 x 15.86 x 9.15	18.75 x 19.17	23.15 x 14.75	21.91 x 17.87	8.65	18.25	14.25	24.00	20.02
24 x 24 x 10	25.41 x 26.68 x 11.41	23.91 x 23.91 x 11.88	N/A	25.69 x 18.00	N/A	10.56	22.25	22.25	26.69	21.86

Engineering Properties

Typical Properties	Typical Values	Unit	Standard
Flammability (resin/component)	V-0 / 5V-A		UL 94
UV-light	F1		UL 746C
Enclosure Types	1, 3R, 4, 4X, 6P, 12 / IP66, IP68		UL 50 / IEC 60529
Falling Dirt Impact (D 3029), 73°F	124	ft-lb	ASTM D 3029
Izod Impact, unnotched, 73°F	60	ft-lb/in	ASTM D 4812
Tensile Impact, Type "S"	250	ft-lb/in ²	ASTM D 1822
HDT, 264 psi, 0.250", unannealed	270	°F	ASTM D 648
CTE, flow, -40°F to 200°F	3.8E-05	1/°F	ASTM E 831
Flexural Stress, yld, 0.05 in/min, 2 in span	13100	psi	ASTM D 790
Normal Temperature Range	-20 to +240 (-29 to +115)	°F (°C)	
Volume Resistivity	>1.E+17	Ohm-cm	ASTM D 257



Stahlin Non-Metallic Enclosures
500 Maple Street
Belding, MI 48809
Phone: 616-794-0700
Website: www.stahlin.com

