


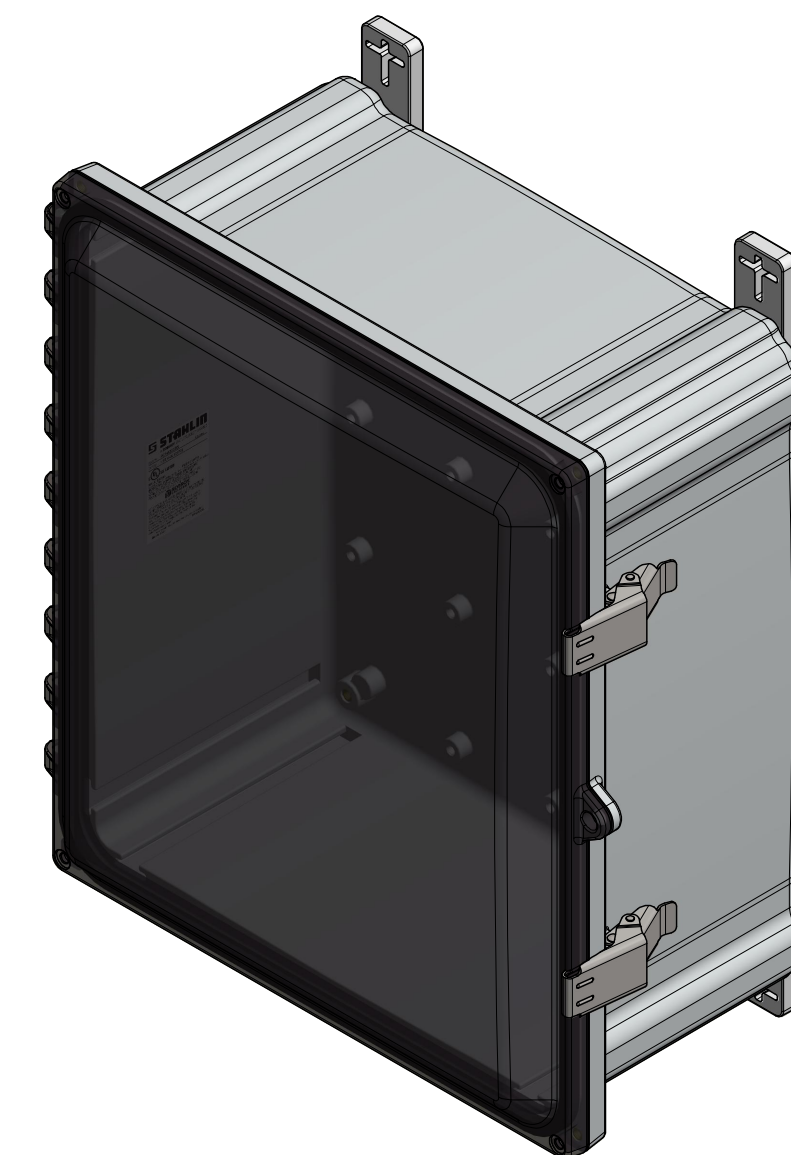


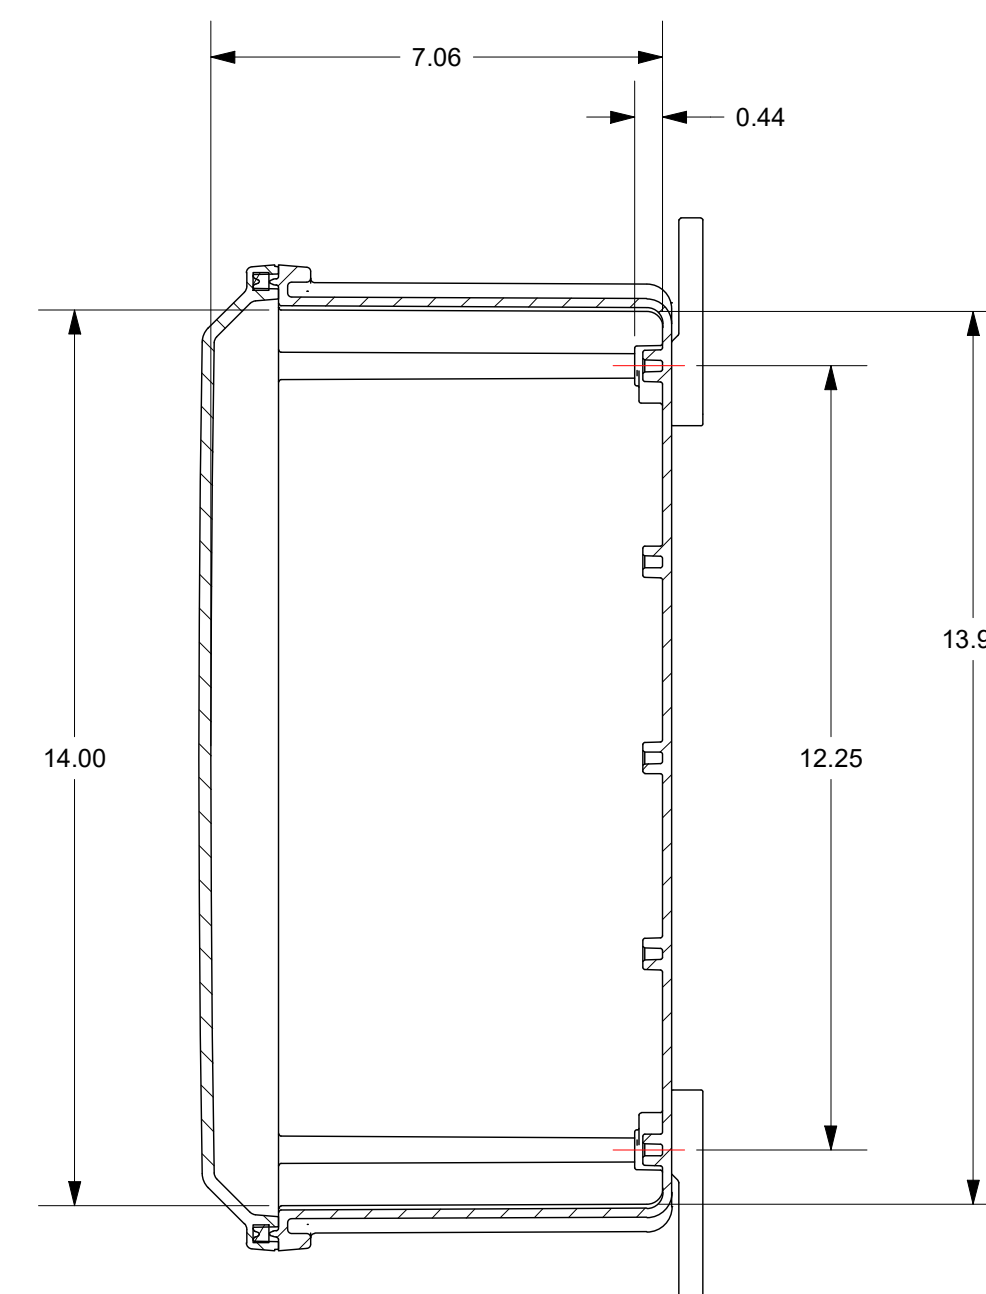





FOR REFERENCE ONLY
MOUNTING FEET SHOWN AS INSTALLED

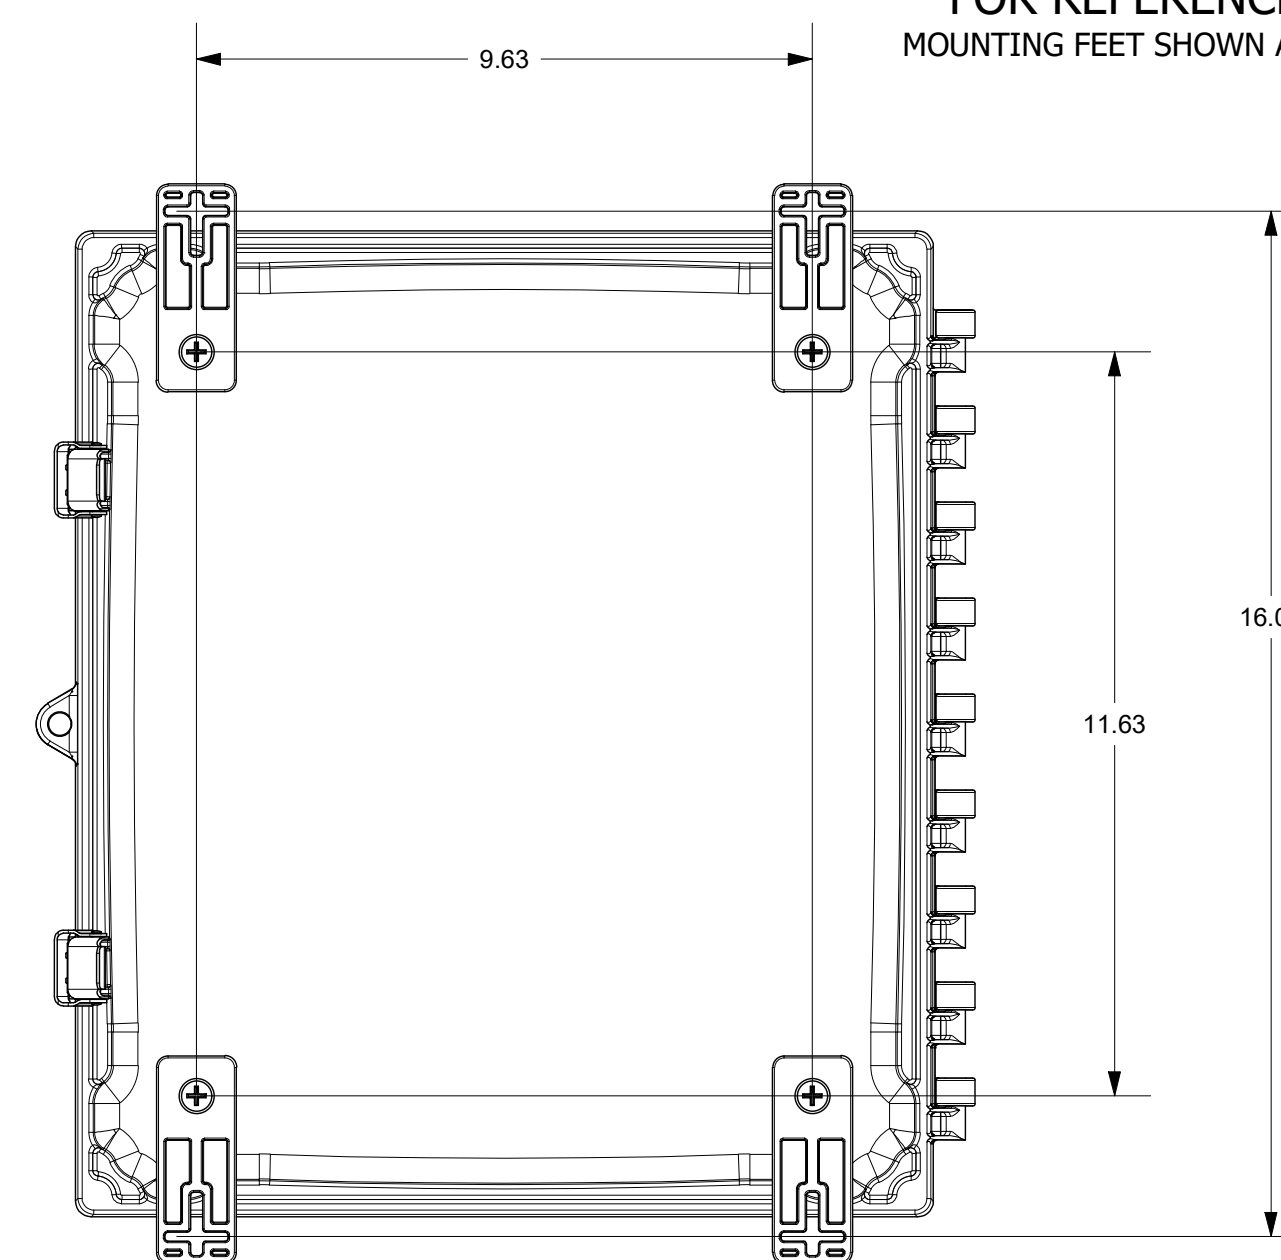

SECTION B-B

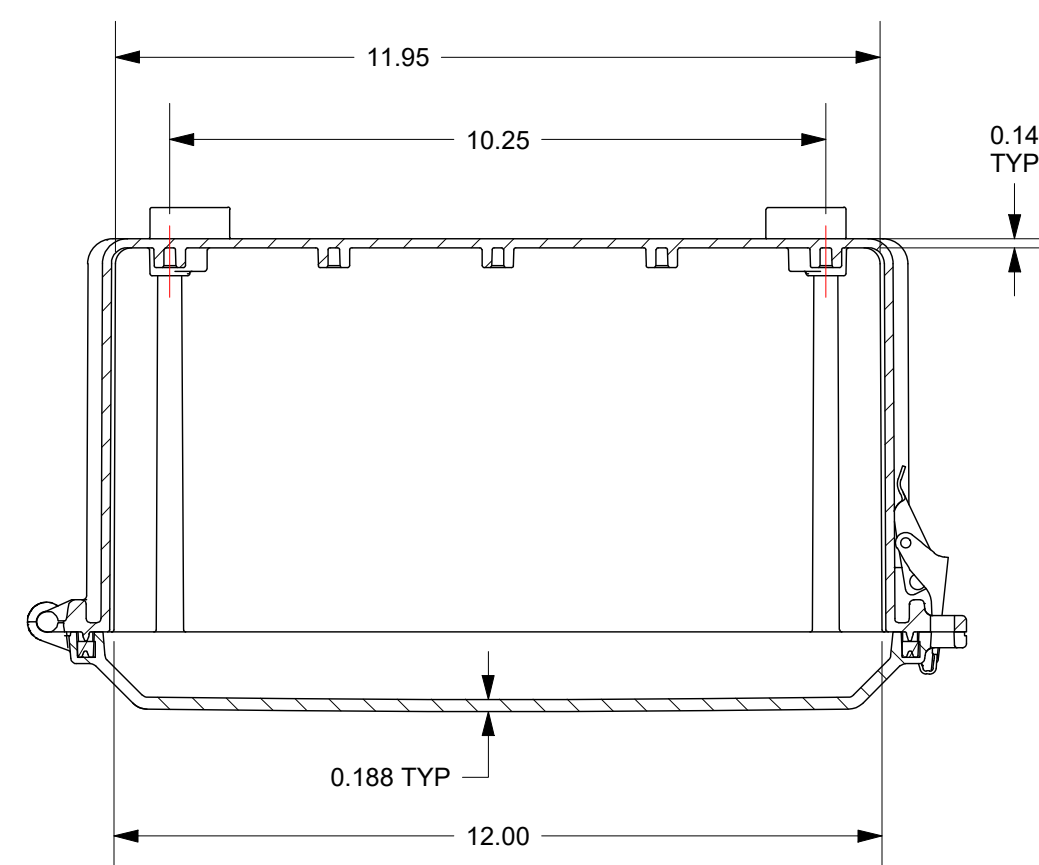

SECTION A-A

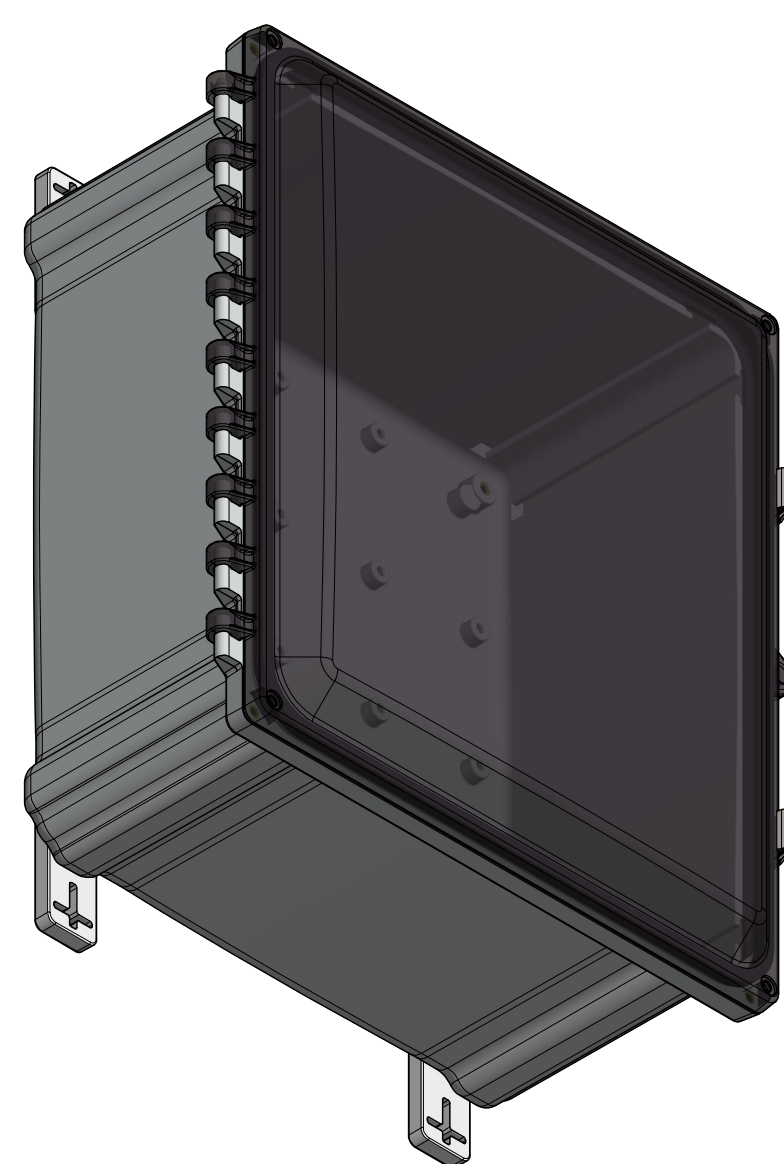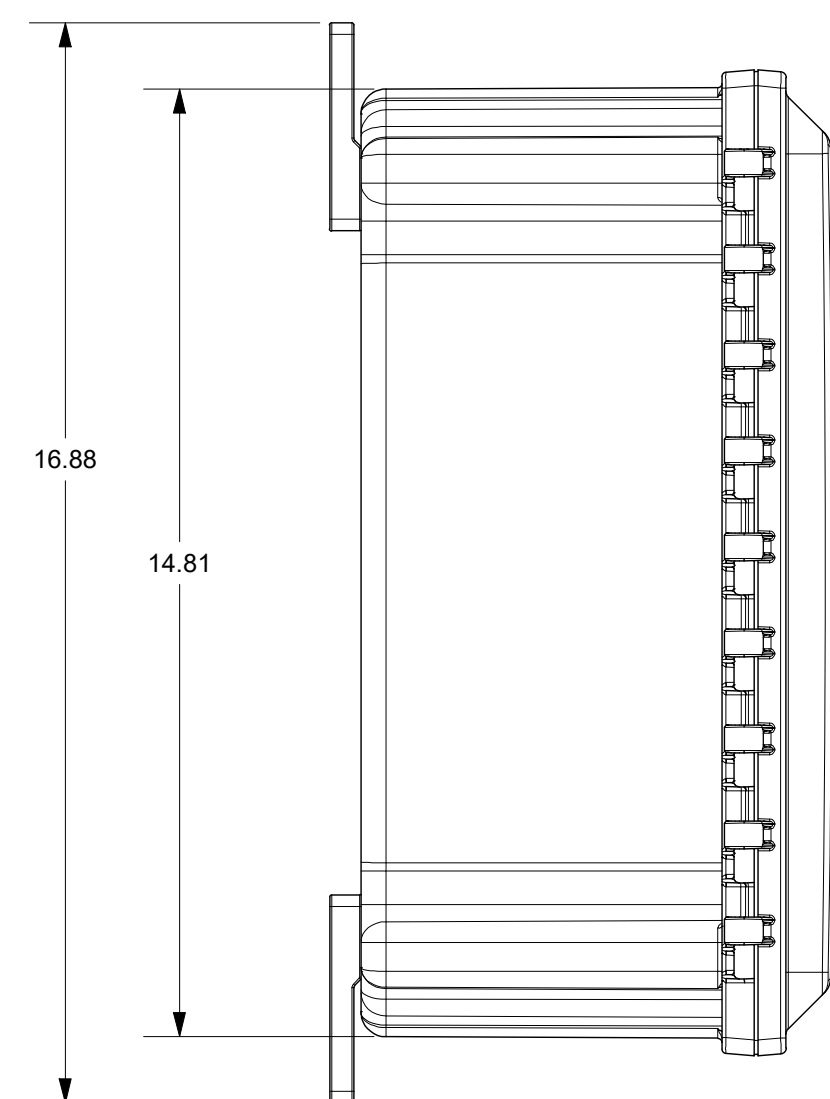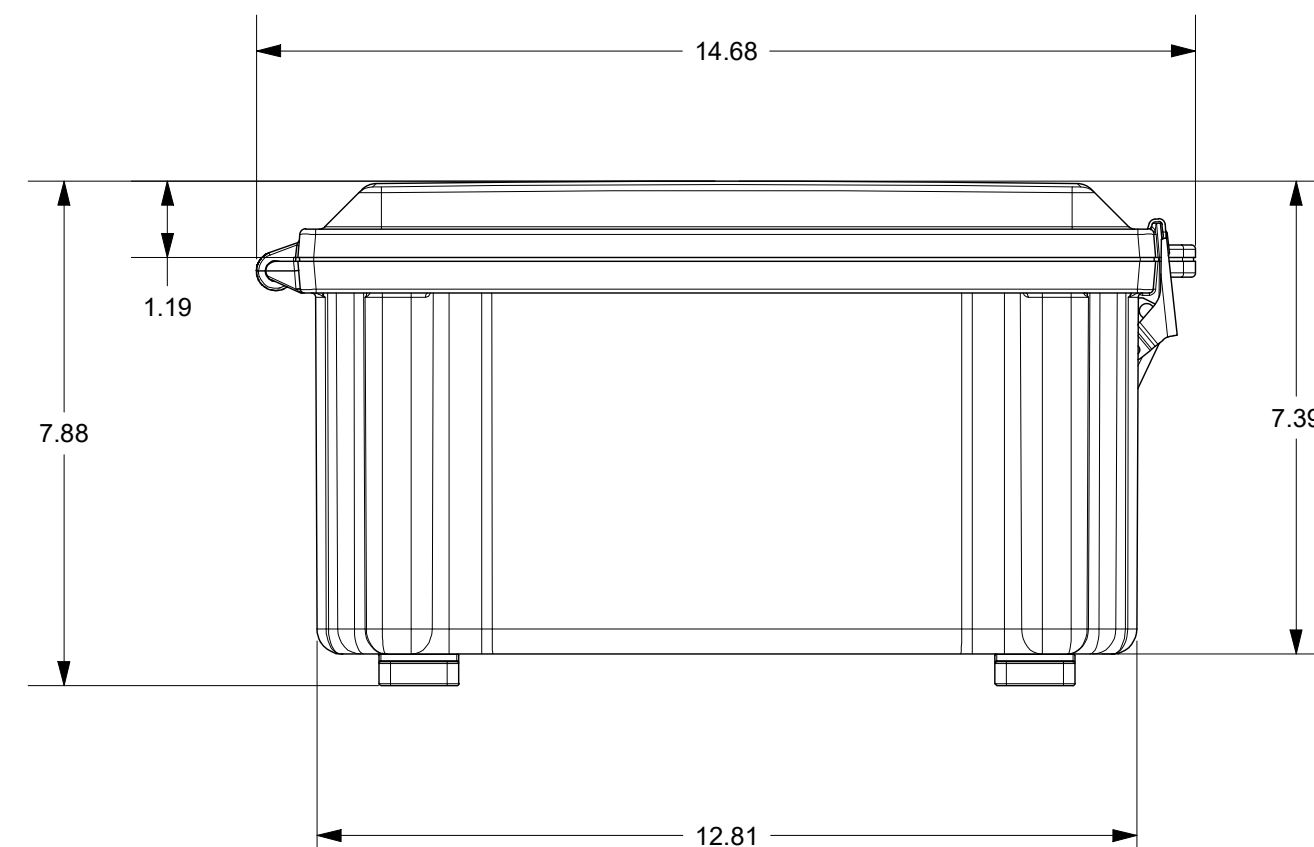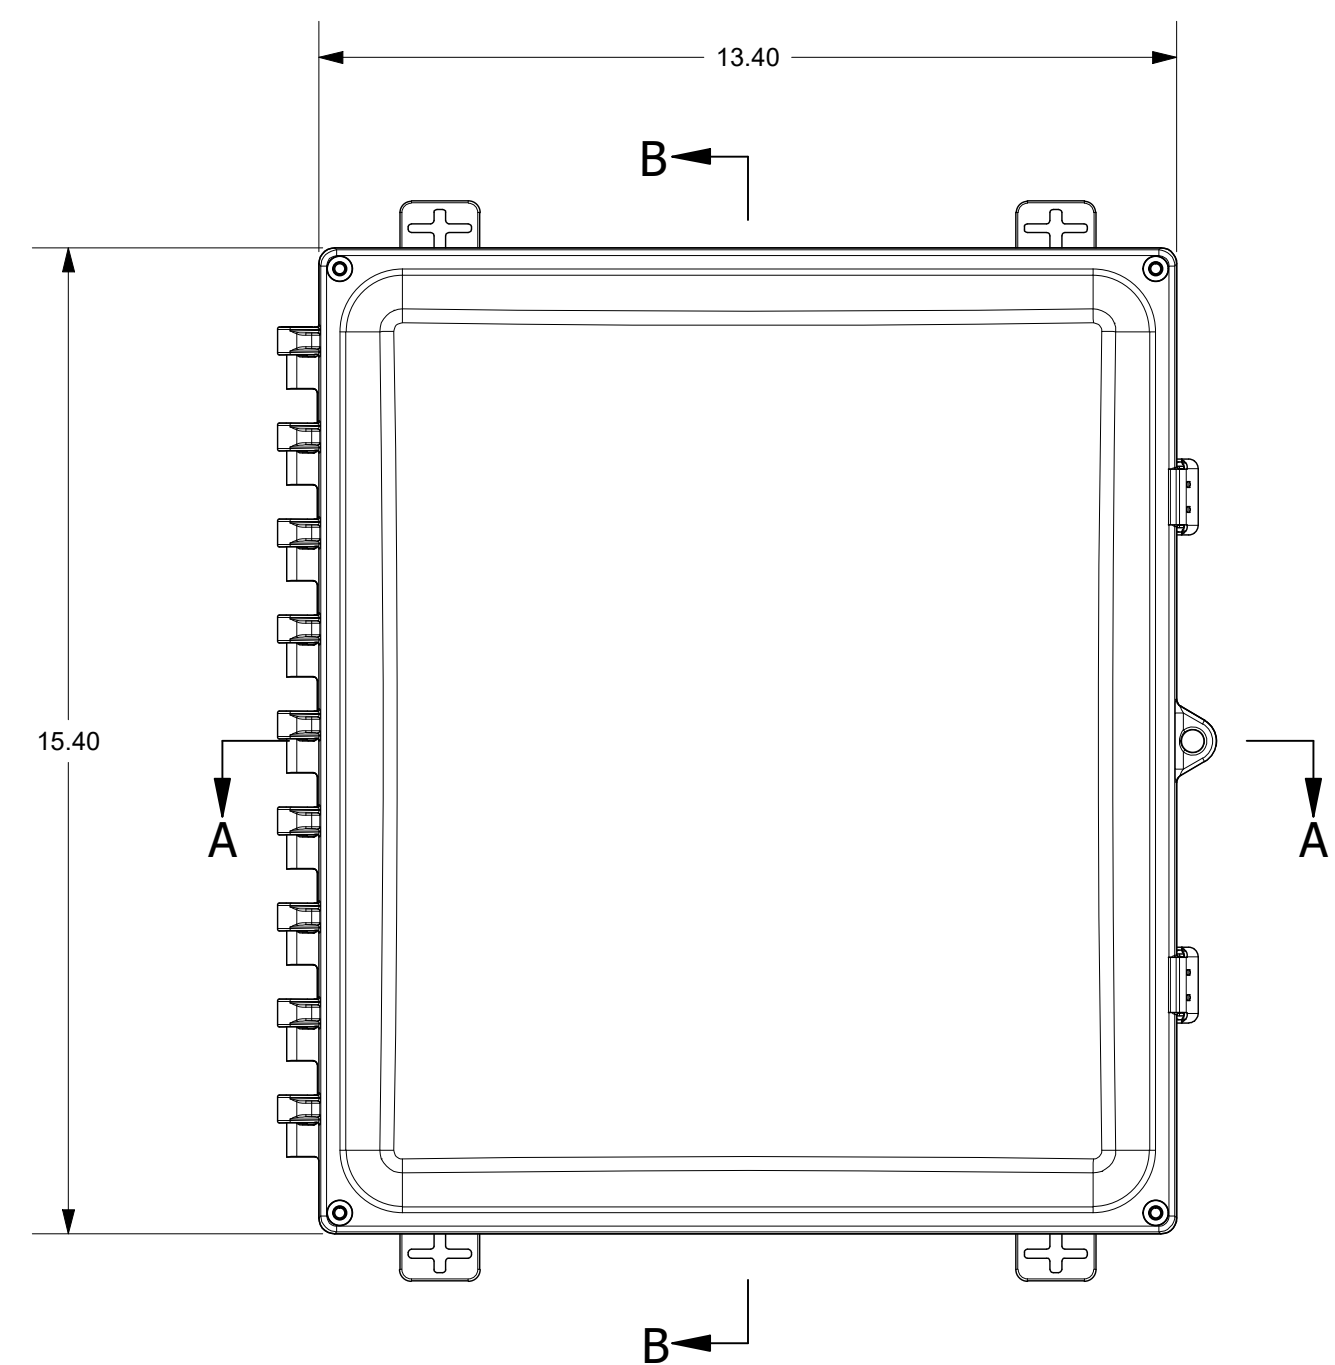

THIS DRAWING IS THE SOLE AND EXCLUSIVE PROPERTY OF ROBROY ENCLOSURES. NO PART OF THIS DRAWING MAY BE REPRODUCED, DISTRIBUTED, OR PUBLICLY DISPLAYED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROBROY ENCLOSURES. ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS. COPYRIGHT © 2020 ROBROY ENCLOSURES

SPECIAL REQUIREMENTS

SPECIAL REQUIREMENTS

ASSEMBLY:

1. (1) ACCESSORY KIT (WPPCACCKIT) SHALL BE PACKAGED LOOSELY INSIDE ENCLOSURE HARDWARE INCLUDED:
 - (-4) #14-20 x 1/2" FLAT HEAD PHILLIPS MACHINE SCREW (RMS1C/14-20X.5FLPH)
 - (-4) #10-32 x 5/8" PAN HEAD PHILLIPS MACHINE SCREW (RMS1C/10/32X5/8SS)
 - (-4) #10-32 x 3/8" PAN HEAD SCREW (RMS1C/10/32X3/8ZN)
 - (-4) #10 WASHER (RMAWS10ZN)
2. (1) STYROFOAM SHEET SHALL BE PLACED ON TOP OF COVER INSIDE CARTON

NEMA 250: TYPE: 1, 3R, 4, 4X, 12 IEC 80529: IP66		STANDARD P/N: PC1412CCSS		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		.XX ± 0.03	.XXX ± 0.010
COLOR: N/A COLOR STANDARD: PANTONE 7541 C		CUSTOMER DWG:							
MATERIAL: POLYCARBONATE				S STAHLIN A ROBROY ENCLOSURES™ BRAND Robroy Enclosure 500 Maple Street Belding, Michigan 48824 Phone: 616-794-0777 Fax: 616-749-3377					
REVISION HISTORY									
REV	DESCRIPTION		DATE	ENG					
-	-		-	-					
-	-		-	-					
-	-		-	-					
-	-		-	-					
-	-		-	-					
-	-		-	-					
-	-		-	-					
				DRAWN BY	DATE	CUSTOMER			DWG
				BH	9/21/2020				PC1412CCSS
				SCALE	DESCRIPTION		PART NUMBER		
				DO NOT SCALE	STANDARD ENCLOSURE		FEPC1412CCSS		



STAHLL
A **ROBBY** ENCLOSURES™ BRAND

Robroy Enclosure
500 Maple Street
Belding, Michigan 48824
Phone: 616-794-0700
Fax: 616-749-3300