

CL

Classic


Stahlin's Classic Series Enclosure



The Stahlin Classic Series has been developed for high-end electronics manufacturers who are looking for both toughness and durability along with modern styling, pleasing aesthetics, and smooth rounded edges. Especially well suited for high visibility locations in both industrial and commercial applications. This product is unique due to its hidden hinge design and flush fitting cover, which suits it well for the intended end use applications such as control stations and operator interface units in both MRO and OEM environments.

**RIGHT PRODUCT
RIGHT PRICE
RIGHT NOW**

Classic Series Featured Highlights

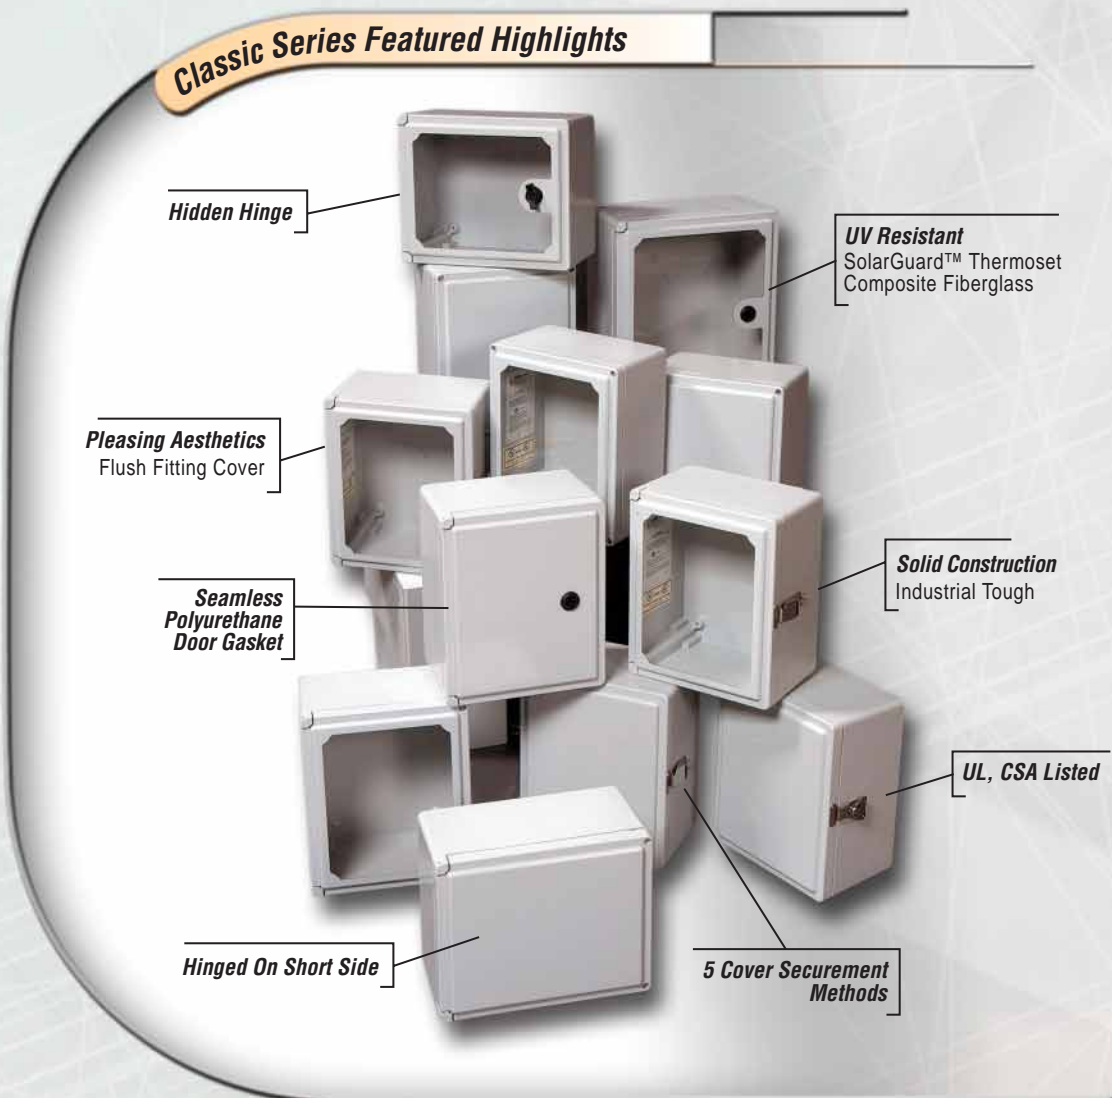

Hidden Hinge

UV Resistant
SolarGuard™ Thermoset
Composite Fiberglass

Pleasing Aesthetics
Flush Fitting Cover

**Seamless
Polyurethane
Door Gasket**

Solid Construction
Industrial Tough

UL, CSA Listed

Hinged On Short Side

**5 Cover Securement
Methods**

Classic Series CL Industry Standards

- UL/cUL 50: File E64358 Type 1, 3, 4X, 12
- NEMA 250: Type 1, 3, 4X, 12
- CSA Std C22.2: File LR069014 Type 1, 3, 4X, 12
- Temperature Range: (-40°F to +250°F) (-40°C to +130°C)
- Flammability Rating: UL94-5V
- Window Flammability: UL94V-0
- Self Extinguishing: Non-flame propagating

Classic Series CL Key Features:

- Over 135 configurations available in 5 sizes
- Size range from 7 x 7 to 15 x 13
- Can be hinged both long and short side
- 5 cover securement methods available
- Flush fitting cover on smooth sided base
- Mounting foot kit available



**SEE REVERSE SIDE
FOR MORE INFORMATION**



Stahlin's Classic Series Configurations



W - 4 Cover Screws, Lift Off Cover

- Lift off cover design
- Stainless steel screw recessed from surface
- Mounting Foot kit available
- Soft edged design throughout



HSW - Hinged on short side, screw cover

- Hinged on short side with integral hinge
- Screw recessed from surface
- Cover secures with two screws
- Full 180°+ door opening



HW - Hinged, 2 Cover Screws

- Integrally hinged cover
- Stainless steel screw recessed from surface
- Cover secures with two screws
- Full 180°+ door opening



HSL - Hinged on short side, through-the-door latch

- Hinged on short side with integral hinge
- Through door latch capture mechanism
- Door mounted entry relieves access problems to side-mounted hardware
- Full 180°+ door opening
- Tool operated or simple handle mechanism
- Secures door with internally mounted hardware



HL - Hinged, Through-the-door latch

- Integrally hinged cover
- Through door latch capture mechanism
- Door mounted mechanism relieves access problems to side-mounted hardware
- Full 180°+ door opening
- Tool operated or simple handle mechanism
- Secures door with internally mounted hardware



HSL - Hinged on short side, link lock latch

- Hinged on short side with integral hinge
- Link lock latch for quick entry
- Latch lies flat on side of enclosure
- Can be lifted and turned with ease
- Full 180°+ door opening



HLL - Hinged, Link lock latch

- Link lock latch for quick entry
- Latch lies flat on side of enclosure
- Can be lifted and turned with ease Full 180°+ door opening



HSPL - Hinged on short side, padlock latch

- Hinged on short side with integral hinge
- Pad lock latch for quick entry
- Snap catch concept with toggle action
- Integral hasp provides secure loop for padlock (not included)
- Full 180°+ door opening



HPL - Hinged, padlock latch

- Padlock latch for quick entry
- Snap catch concept with toggle action
- Integral hasp provides secure loop for padlock (not included)
- Can be lifted and released with ease
- Full 180°+ door opening

Classic Series - Inside Dimensions

Size ID	H x W x D
CL(W)707	6.65 x 6.65 x 4.84
CL(W)907	8.59 x 6.59 x 4.84
CL(W)1109	10.59 x 8.59 x 5.84
CL(W)1311	12.59 x 10.59 x 6.34
CL(W)1513	14.55 x 12.55 x 6.84

(W): Flush Bonded Window Designation

Contact Your Sales Rep:

Stahlin Non-Metallic Enclosures
500 Maple Street
Belding, MI 48809

Phone: 616-794-0700
Fax: 616-794-3378
WWW.STAHLIN.COM

