

# JCC

## JCC Series


## Stahlin's JCC Series Enclosures



Clearly A Great New Product Enhancement Clear Cover Options For Stahlin's J Series. For the first time you can benefit from the exceptional performance of Stahlin's J Series complemented with the open view of a polycarbonate cover. The Stahlin JCC Series is developed for uses in industrial or commercial environments where full viewing of all internal components is necessary. The JCC series is well suited for simple junction point or as an operator interface and systems information center. Rugged design, pleasing aesthetics and durability in the harshest of environments both indoor and outdoor are key attributes of the series.

**RIGHT PRODUCT  
RIGHT PRICE  
RIGHT NOW**

### "JCC" Series Featured Highlights

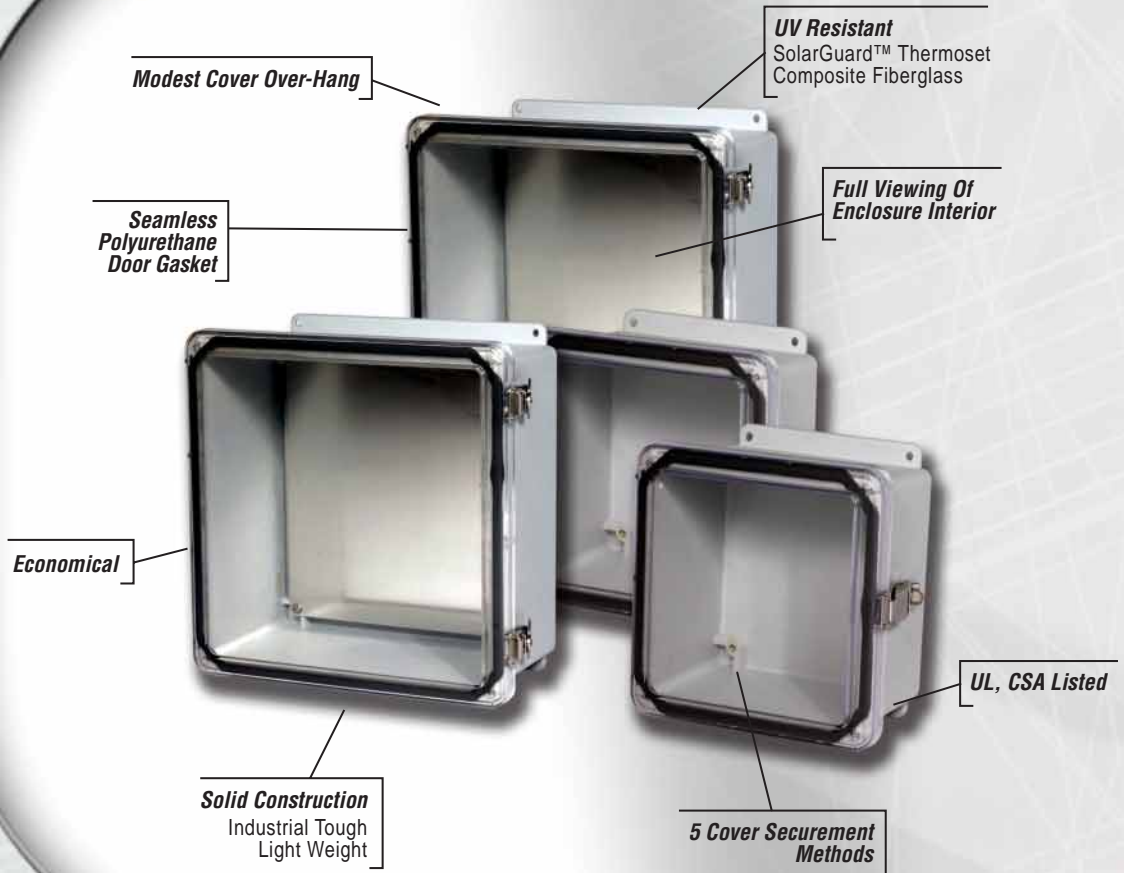

#### JCC Industry Standards:

- Flammability Rating UL94-5V
- Window Flammability UL94V-0
- UL/cUL 50 File E64358 Type 1, 3, 4X, 6P, 12
- NEMA 250 Type 1, 3, 4R, 6P, 12
- CSA Std C22.2 File LR069014 Type 1, 3, 4R, 6P, 12
- Chemical Resistance See our catalog or Stahlin.com
- Temperature Range (-40°F to + 180°F) (-40°C to + 85°C)

#### JCC Series Key Features:

- 14 configurations available in 2 sizes
- Available in 8 x 8 to 12 x 12
- 7 cover securement methods available
- Integrally molded mounting flange
- Submersion rated
- Flame retardant, UV resistant, clear polycarbonate cover



**SEE REVERSE SIDE  
FOR MORE INFORMATION**



# Stahlin's JCC Series Configurations



### **W- 4 cover screws**

- FIP Urethane, Seamless Gasket
- 300 Series Stainless Steel
- Integrally Molded Mounting Feet
- Back Panel & Cover Screw Inserts: Brass, #10 - 32, #10-24
- Flame retardant, UV resistant, clear poly carbonate Clear Cover
- Opaque FRP - UV resistant SolarGuard



### **FHW- Fiberglass Hinge, 4 Cover Screws**

- FIP Urethane, Seamless Gasket
- 300 Series Stainless Steel
- Integrally Molded Mounting Feet
- Back Panel & Cover Screw Inserts: Brass, #10 - 32, #10-24
- Flame retardant, UV resistant, clear poly carbonate Clear Cover
- Opaque FRP - UV resistant SolarGuard



### **HW- Hinged, 2 cover screws**

- FIP Urethane, Seamless Gasket
- 300 Series Stainless Steel
- Integrally Molded Mounting Feet
- Back Panel & Cover Screw Inserts: Brass, #10 - 32, #10-24
- Flame retardant, UV resistant, clear poly carbonate Clear Cover
- Opaque FRP - UV resistant SolarGuard



### **FHLL- Fiberglass Hinged, Link Lock Latch Configuration**

- Fiberglass hinge for maximum corrosion resistance
- Removable lift off cover capability
- Padlock latch for quick entry and added security
- Full 180°+ door opening (Not UL/CSA Rated)



### **HLL- Hinged, Link Lock Latch**

- FIP Urethane, Seamless Gasket
- 300 Series Stainless Steel
- Integrally Molded Mounting Feet
- Back Panel & Cover Screw Inserts: Brass, #10 - 32, #10-24
- Flame retardant, UV resistant, clear poly carbonate Clear Cover
- Opaque FRP - UV resistant SolarGuard



### **FHPL- Fiberglass Hinged, Padlock Latch Configuration**

- Fiberglass hinge for maximum corrosion resistance
- Removable lift off cover capability
- Padlock latch for quick entry and added security
- Full 180°+ door opening (Not UL/CSA Rated)



### **HPL- Hinged, Pull Latch**

- FIP Urethane, Seamless Gasket
- 300 Series Stainless Steel
- Integrally Molded Mounting Feet
- Back Panel & Cover Screw Inserts: Brass, #10 - 32, #10-24
- Flame retardant, UV resistant, clear poly carbonate Clear Cover
- Opaque FRP - UV resistant SolarGuard

### **JCC Series - Inside Dimensions**

Size ID	H x W x D
JCC808	7.73 x 7.73 x 4.82
JCC1212	11.70 x 11.70 x 6.29

Contact Your Sales Rep:

Stahlin Non-Metallic Enclosures  
500 Maple Street  
Belding, MI 48809

Phone: 616-794-0700  
Fax: 616-794-3378  
**WWW.STAHLIN.COM**

