

RJ

RJ & RJW Series


Stahlin's RJ & RJW Series Enclosures



The Stahlin RJ Series product line was developed as an industrial enclosure for harsh, aggressive environments. Originally developed as an electrical junction box for the oil refining and petrochem industries, the RJ series has evolved over the years into a versatile industrial enclosure with varied applications for use from high-end electronics to extreme corrosive applications both indoors and out. Rugged design combined with tough, durable materials, for extreme reliability in tough environments are key attributes of this series.

**RIGHT PRODUCT
RIGHT PRICE
RIGHT NOW**

"RJ" Series Featured Highlights

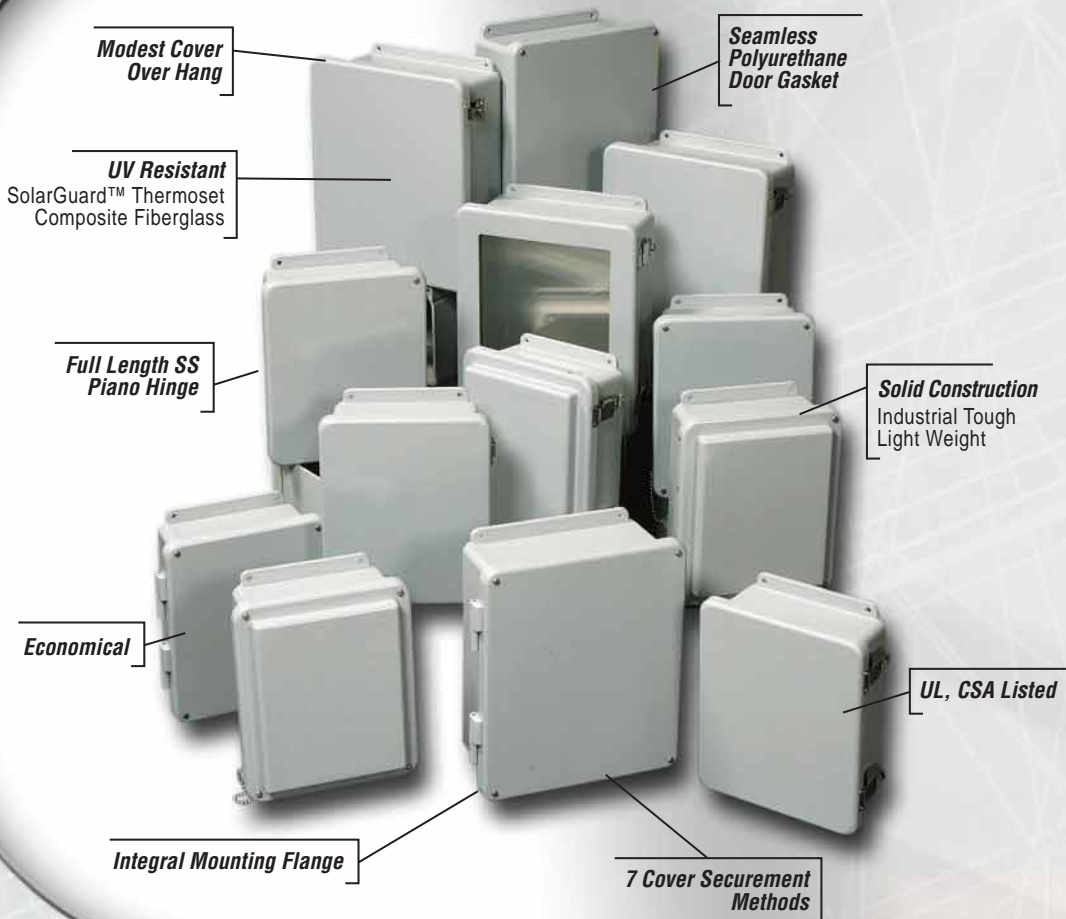

RJ & RJW Industry Standards:

- Flammability Rating UL94-5V
- Window Flammability UL94V-0
- UL/cUL 50 File E64358 Type 1, 3, 4X, 6P, 12
- NEMA 250 Type 1, 3, 4X, 6P, 12
- CSA Std C22.2 File LR069014 Type 1, 3, 4X, 6P, 12
- Self Extinguishing Non-flame propagating
- Temperature Range (-40°F to +250°F) (-40°C to +120°C)

RJ & RJW Series Key Features:

- Over 150 configurations available in 11 sizes
- Size range from 6 x 4 to 20 x 16
- Raised cover for added depth
- 7 cover securement methods available
- Integrally molded mounting flange
- Submersion rated



**SEE REVERSE SIDE
FOR MORE INFORMATION**



Stahlin's RJ & RJW Series Configurations



W - 4 cover screws, lift off cover configuration

- Lift off cover design
- Surface flat stainless steel screw
- Integral mounting flange
- Extended depth in cover
- Overhang cover
- Stainless steel beaded cover retention chain



FHW - Fiberglass hinged, 4 cover screws configuration

- Fiberglass hinge provides maximum corrosion resistance
- Pan head stainless steel screws maintain low profile on cover
- Four cover screws configuration secures cover
- Full 180°+ door opening



HW - Hinged, 2 cover screws configuration

- Full length stainless steel hinged cover
- Surface flat stainless steel screws
- Full 180°+ door opening
- Extended depth cover



FHLL - Fiberglass hinged, link lock latch configuration

- Fiberglass hinge for maximum corrosion resistance
- Removable lift off cover capability
- Link lock latch mechanism for easy entry
- Full 180°+ door opening
- Extended depth cover (Not UL/CSA Rated)



HLL - Hinged, link lock latch configuration

- Link lock latch for quick entry
- Latch lies flat on side of enclosure
- Can be lifted and turned with ease
- Full 180°+ door opening



FHPL Fiberglass hinged, padlock latch configuration

- Fiberglass hinge for maximum corrosion resistance
- Removable lift off cover capability
- Padlock latch for quick entry and security capabilities
- Extended depth cover
- Full 180°+ door opening (Not UL/CSA Rated)



HPL - Hinged, padlock latch configuration

- Padlock latch for quick entry
- Snap catch concept with toggle action
- Integral hasp provides secure loop for padlock (padlock not included)
- Can be lifted and released with ease
- Full 180°+ door opening

RJ & RJW Series - Inside Dimensions

Size ID	H x W x D
RJ(W)604	5.84 x 3.85 x 5.95
RJ(W)606	5.72 x 5.72 x 5.95
RJ(W)806	7.73 x 5.74 x 5.95
RJ(W)806	7.73 x 5.74 x 5.95
RJ(W)808	9.56 x 9.47 x 5.09
RJ(W)1210	11.79 x 9.80 x 6.32
RJ(W)1212	13.56 x 13.47 x 6.56
RJ(W)1412	13.53 x 11.55 x 7.45
RJ(W)1614	15.63 x 13.60 x 7.45
RJ(W)1816	17.69 x 15.69 x 10.31
RJ(W)2016	19.72 x 15.72 x 10.21

(W): Flush Bonded Window Designation

Contact Your Sales Rep:

Stahlin Non-Metallic Enclosures
500 Maple Street
Belding, MI 48809

Phone: 616-794-0700
Fax: 616-794-3378
WWW.STAHLIN.COM

