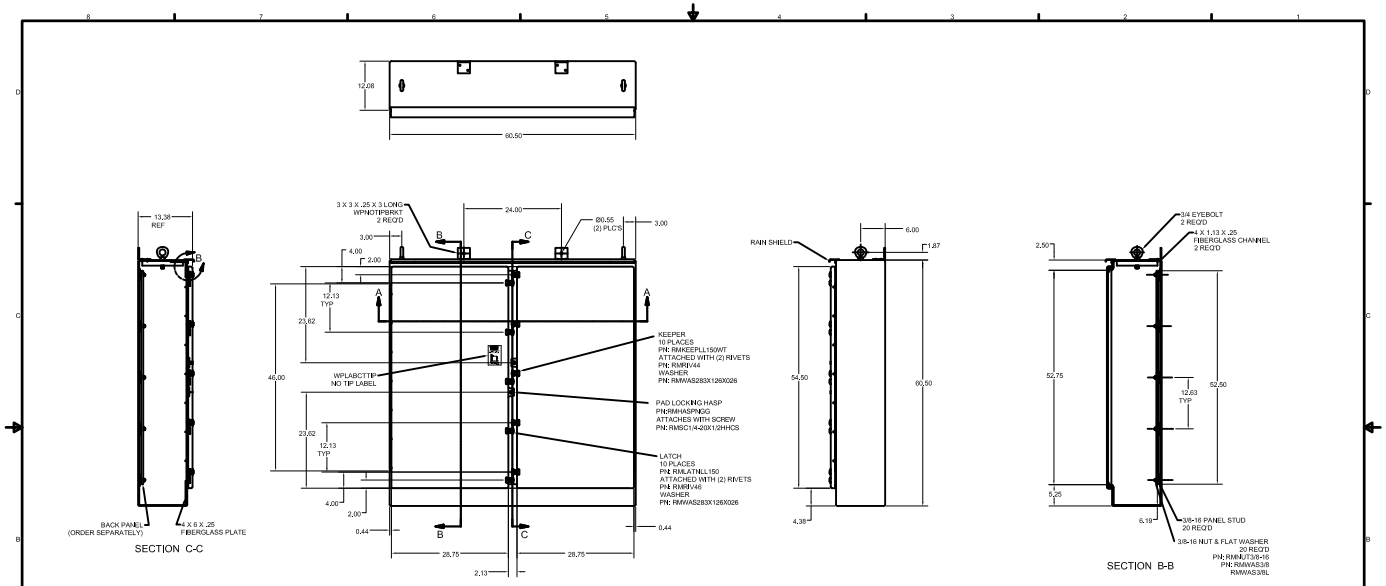

SPECIAL REQUIREMENTS

ASSEMBLY
- (10) RIVETS FOR LATCH, KEEPER, AND HASP APPLY SILICONE BETWEEN HOLE AND BOTTOM OF RIVETS.
- TYP WALL THICKNESS=0.250

MATERIAL	UL TYPE 3R, IEC IP55 COLOR: GLACIER GRAY (RR3013) FJX, POLYESTER FIBERGLASS
TOLERANCES	ALL DIMENSIONS ARE INCHES (MILLIMETERS) UNLESS SPECIFIED .XX ± 0.13 (3.18) .XXX ± 0.063 (1.794)
DSG BY / DATE	CHP PM 10/3/2008
CHK BY / DATE	
APD BY / DATE	
CUSTOMER	
SCALE	DWG
PART NAME	ENCLOSURE
PART NO.	N060612FSDDRT

LTR	REVISION RECORD	DATE	BY	CHKD
A	CHANGE WALL THICKNESS .210 TO 1/4	03/20/13	AK	

STAHLIN ENCLOSURES
BELDING, MICHIGAN 48809

THIS DRAWING AND THE INFORMATION HEREON ARE THE EXCLUSIVE PROPERTY OF STAHLIN ENCLOSURES AND SHALL NOT BE REPRODUCED OR LOANED BY STAHLIN ENCLOSURES, OR MADE PUBLIC IN ANY MANNER, EXCEPT BY WRITTEN PERMISSION FROM STAHLIN ENCLOSURES. UNLESS OTHERWISE NOTED.